



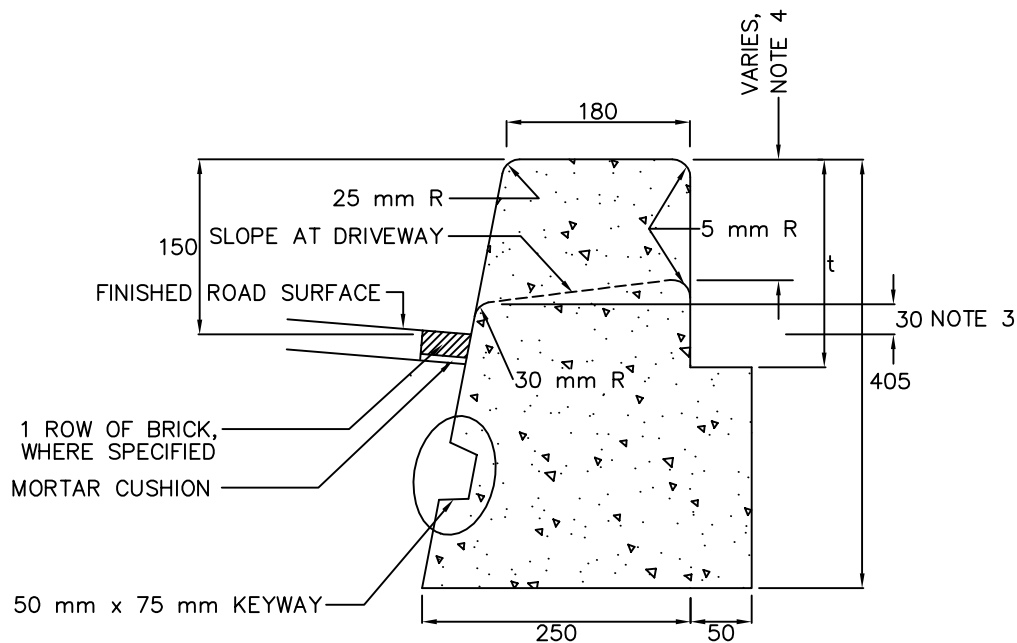

FOR USE WITH RIGID PAVEMENT

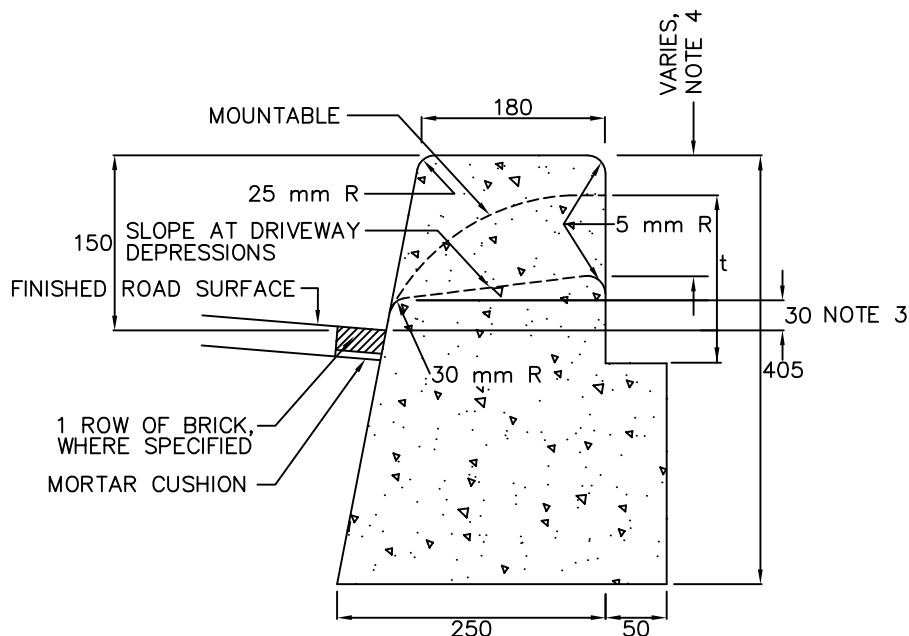

NOTES:

FOR USE WITH FLEXIBLE PAVEMENT

1. EXPANSION JOINTS SHALL BE SPACED 6 METERS APART OR COINCIDE WITH JOINTS IN ADJACENT SIDEWALK AND CONCRETE ROAD BASE.
2. $t=130\text{mm}$, 150mm or 180mm TO SUIT CONCRETE SIDEWALK, CONCRETE BOULEVARD OR CONCRETE DRIVEWAY MEASURED FROM THE TOP OF CURB DEPRESSION.
3. 10mm FOR SIDEWALK RAMPS AND DISABILITY ACCESSSES.
4. ENTRANCE TERMINATION AS PER DRAWING T-350.01.
DROP CURB AT ENTRANCE, TYP. $70-100\text{ mm}$,
DEPENDS ON SITE CONDITION AS SPECIFIED.
5. $2-15\text{mm}$ REINFORCING BARS FOR DRIVEWAYS, 50mm CONCRETE COVER, TO BE EXTENDED 600mm BEYOND WIDTH OF DRIVEWAY ON EACH END.

METRIC
ALL DIMENSIONS SHOWN HERE ARE IN
MILLIMETRES UNLESS OTHERWISE NOTED



TECHNICAL SERVICES
Engineering Services - Works Facilities & Structures
CADD Services

SCALE:	N.T.S.	CONCRETE CURB	DRAWING NUMBER:
DATE:	NOVEMBER 2009		T-600.11-1
DRAFTING:	V. DIDIANO		GENERAL