



**6TH FLOOR FRAMING PLAN**  
SCALE 1:100

- TOP OF SLAB IS AT ELEVATION AS SHOWN ON ARCH. DRAWINGS EXCEPT AS CROSSED AND NOTED ON PLAN.
- CONCRETE STRENGTH AT 28 DAYS SHALL BE:  
FOR WALLS AND COLUMNS ..... 35 MPa  
FOR INTERIOR SLABS ..... 35 MPa  
FOR EXTERIOR SLABS ..... 35 MPa  
CONCRETE EXPOSED TO ELEMENTS SHALL BE 35 MPa WITH 4% AIR ENTRAINMENT.
- FLOOR SLABS ARE DESIGNED FOR FOLLOWING LOADING CONDITIONS:  

SLABS & BALCONIES	S.L.O.	L.L.
COCKPITS & STORAGE	0.50 kPa	4.80 kPa
RESIDENTIAL	1.30 kPa	4.80 kPa
POULETS	1.30 kPa	2.40 kPa
TERRACES	5.0 kPa	4.80 kPa

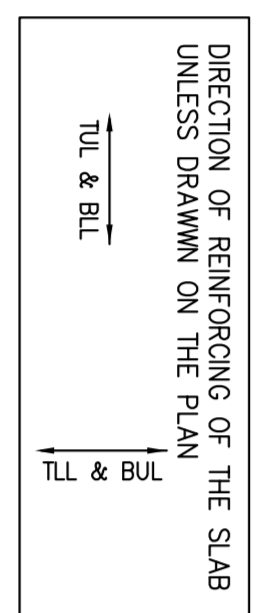

- MINIMUM YIELD STRESS FOR REINFORCING STEEL SHALL BE 400 MPa.
- TEMPERATURE REINFORCING FOR:  
210 SLAB IS 100000  
200 SLAB IS 150000
- NO OPENINGS LARGER THAN 300mm x 300mm ARE ALLOWED. SMALLER OPENINGS SHALL BE NOTED ON ARCH. DRAWINGS.
- SEE TYPICAL DETAILS ON DRAWINGS S-201 TO S-205.
- SEE GENERAL NOTES ON DRAWING S-201.
- REFER TO ARCH. DRAWINGS FOR SIZES OF SLAB.
- FOR COLUMN & WALL SCHEDULE SEE DRAWINGS S-201 TO S-206.
- COORDINATE BEAM DEPTH AT DOOR OPENINGS WITH ARCH. DRAWINGS.
- TOP BARS TERMINATING AT EDGE OF SLAB TO HAVE 180° HOOK.



**ALEXANDRA PARK - BLOCK 11**  
TORONTO, ONTARIO

NO.	ISSUED FOR	DATE
1	FOR PERMIT	2014.03.04
2	FOR CONSTRUCTION	2014.03.04
3	FOR CONSTRUCTION	2014.03.04
4	FOR CONSTRUCTION	2014.03.04
5	FOR CONSTRUCTION	2014.03.04
6	FOR CONSTRUCTION	2014.03.04
7	FOR CONSTRUCTION	2014.03.04
8	FOR CONSTRUCTION	2014.03.04
9	FOR CONSTRUCTION	2014.03.04
10	FOR CONSTRUCTION	2014.03.04
11	FOR CONSTRUCTION	2014.03.04
12	FOR CONSTRUCTION	2014.03.04
13	FOR CONSTRUCTION	2014.03.04
14	FOR CONSTRUCTION	2014.03.04
15	FOR CONSTRUCTION	2014.03.04
16	FOR CONSTRUCTION	2014.03.04
17	FOR CONSTRUCTION	2014.03.04
18	FOR CONSTRUCTION	2014.03.04
19	FOR CONSTRUCTION	2014.03.04
20	FOR CONSTRUCTION	2014.03.04

**Joblontsky, Ast and Partners ENGINEERS**  
1100 SHEPPARD AVENUE EAST  
SUITE 1000  
SCARBOROUGH, ONTARIO M1B 2Y4  
TEL: 416-441-2777  
FAX: 416-441-2778  
E-MAIL: info@joblontsky.com