




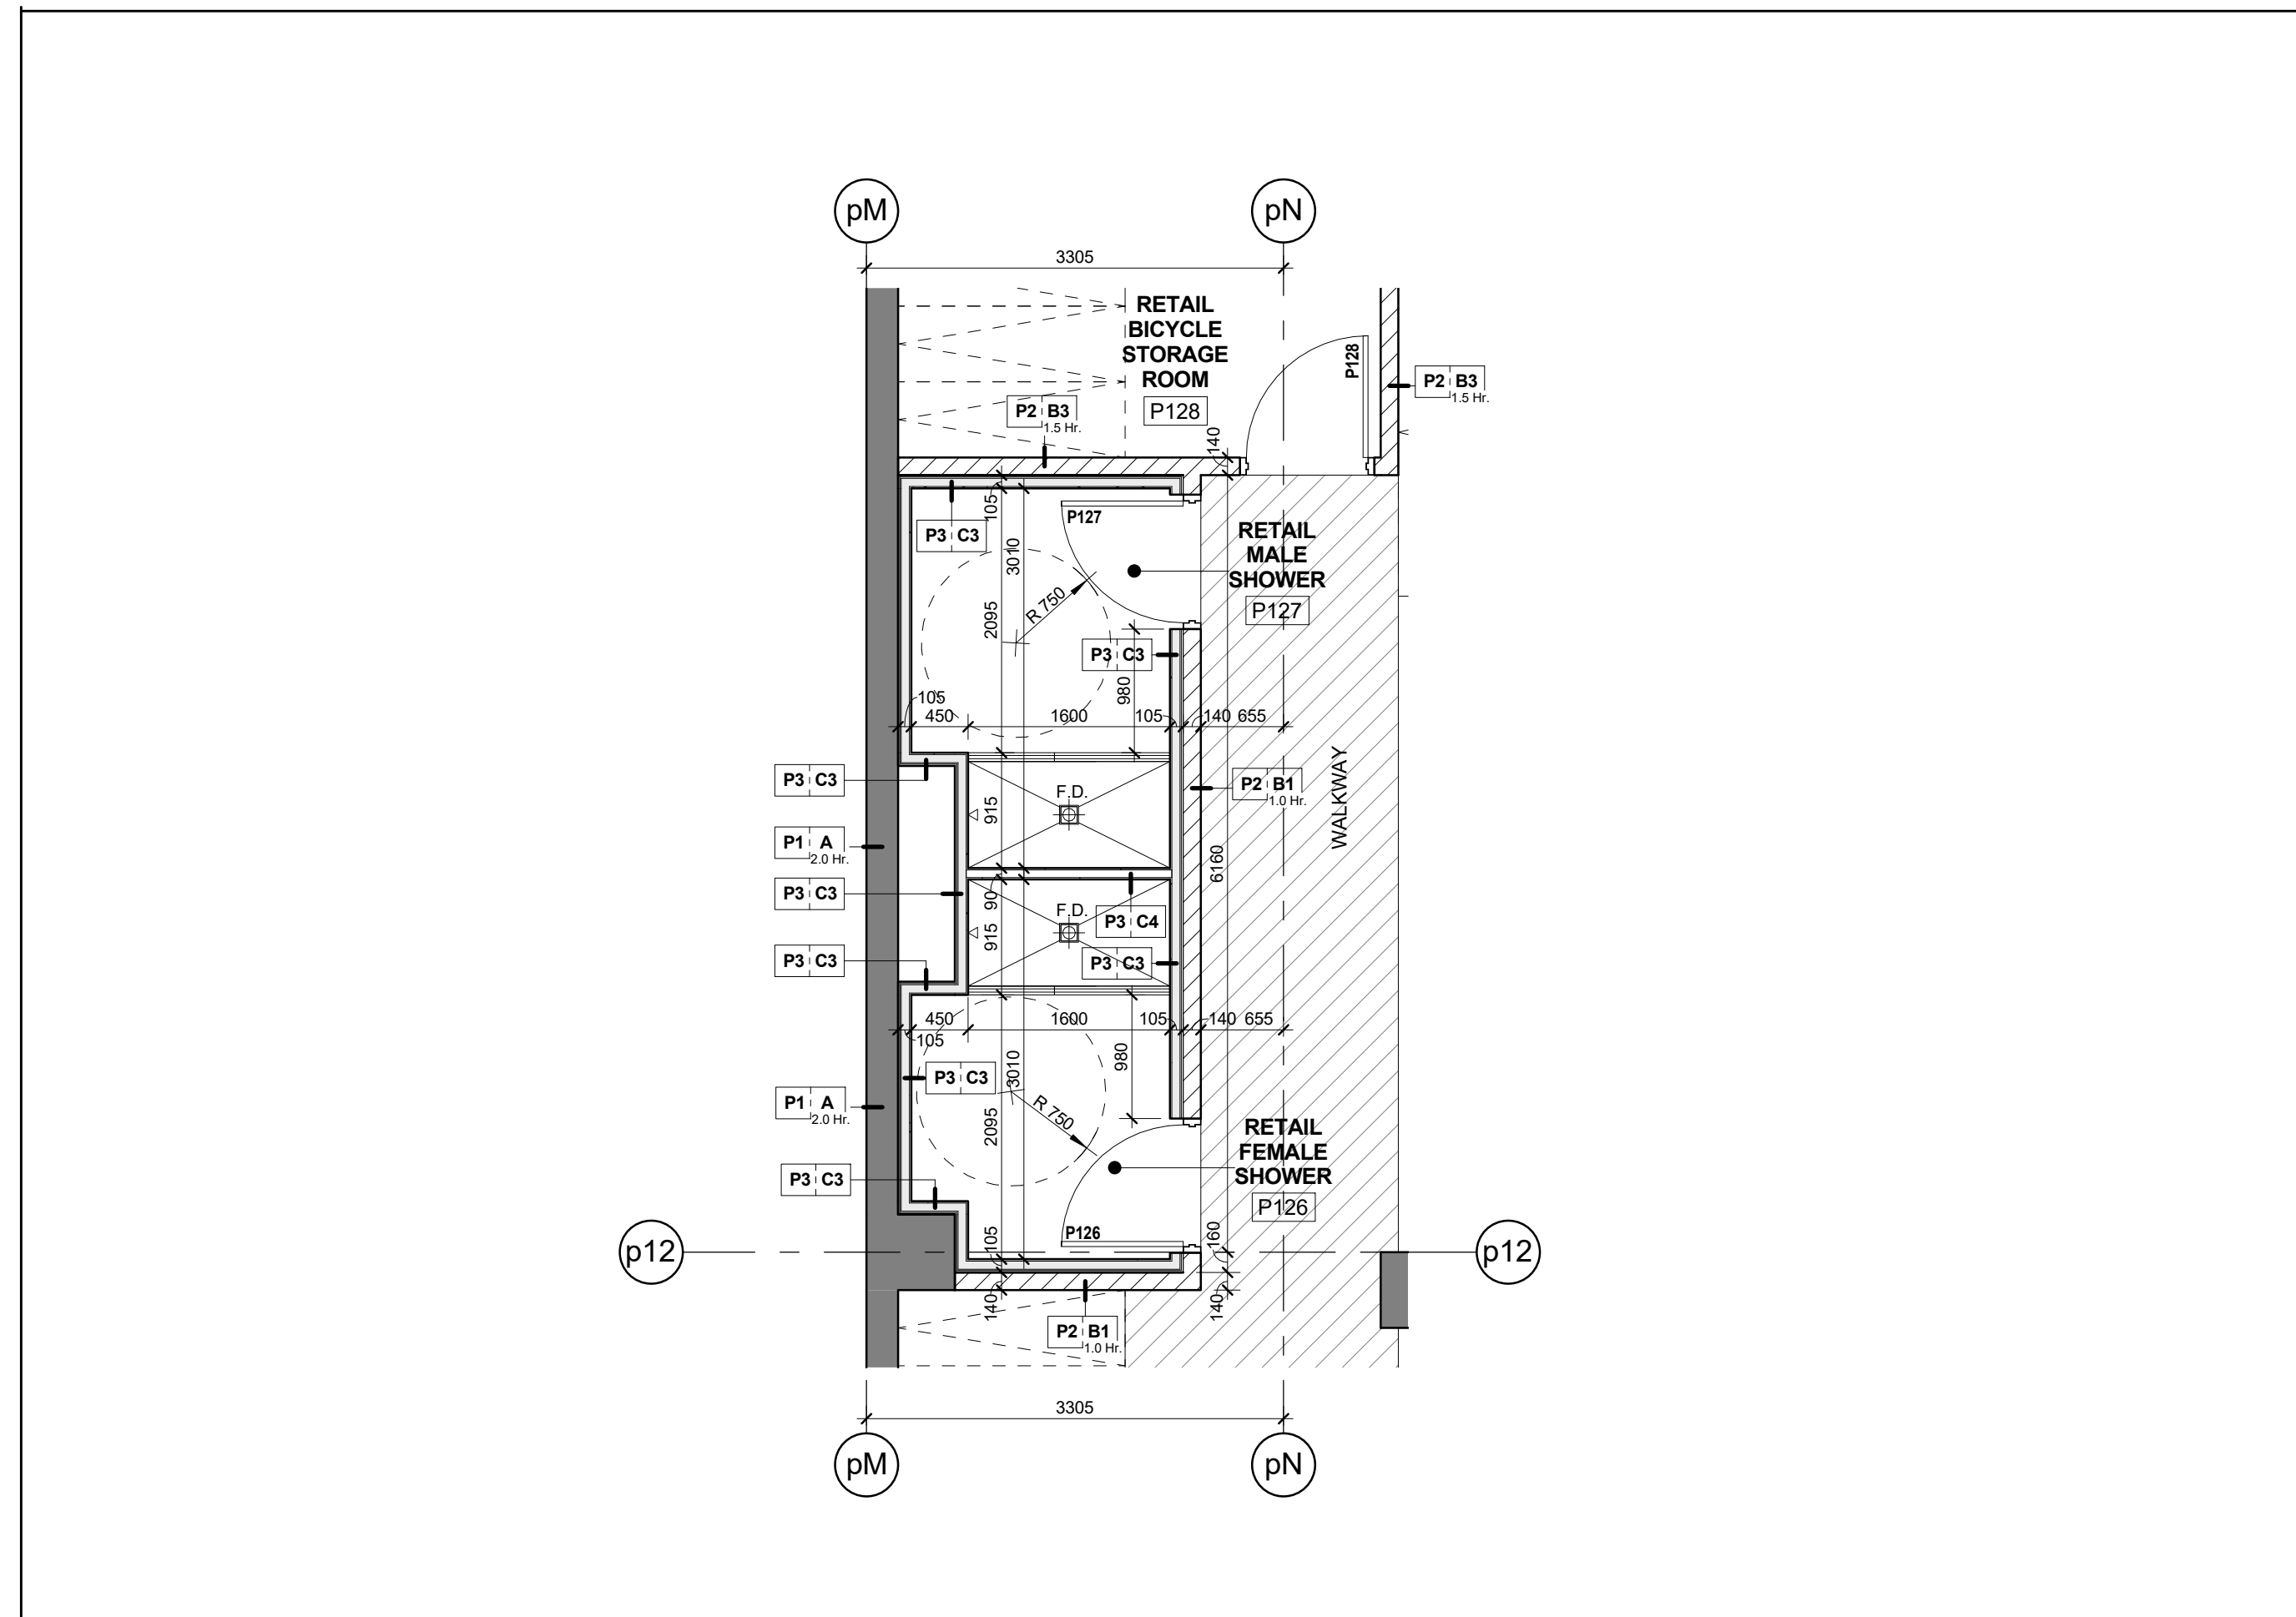


Level P1 - Underground Parking Garage - Commercial Showers

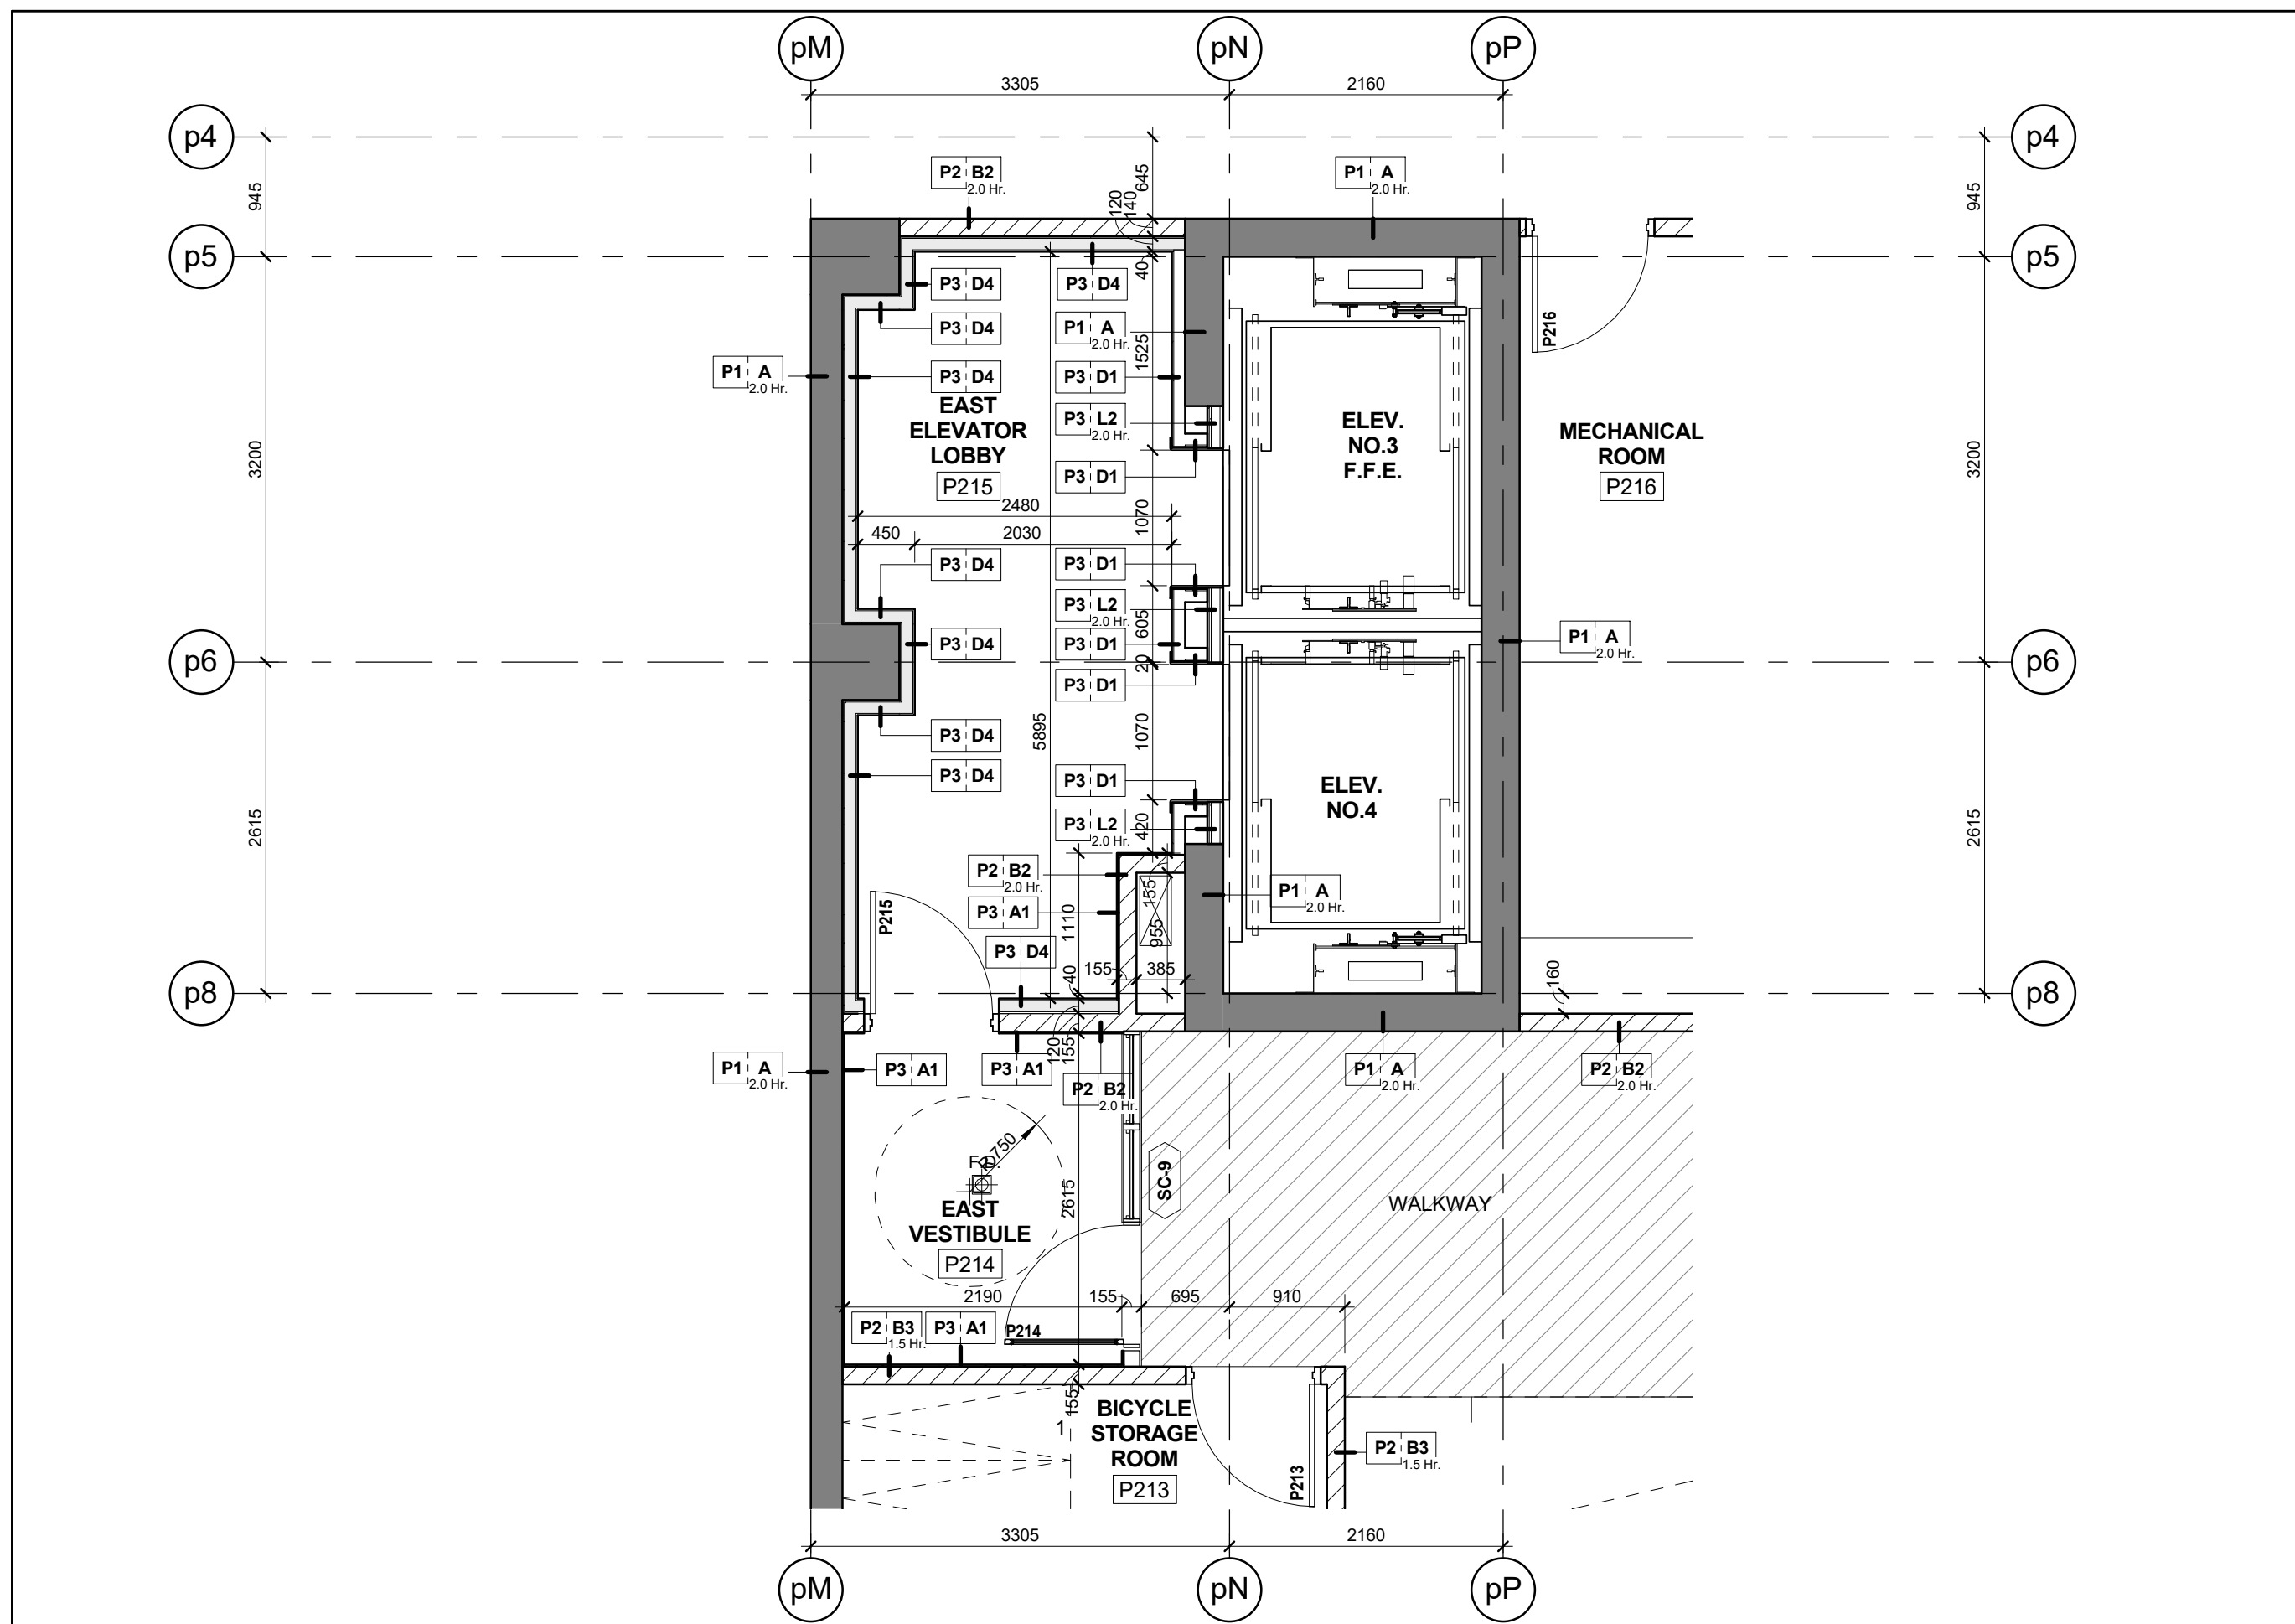


Level P1-P2 - Underground Parking Garage - East Residential Elevator Lobby

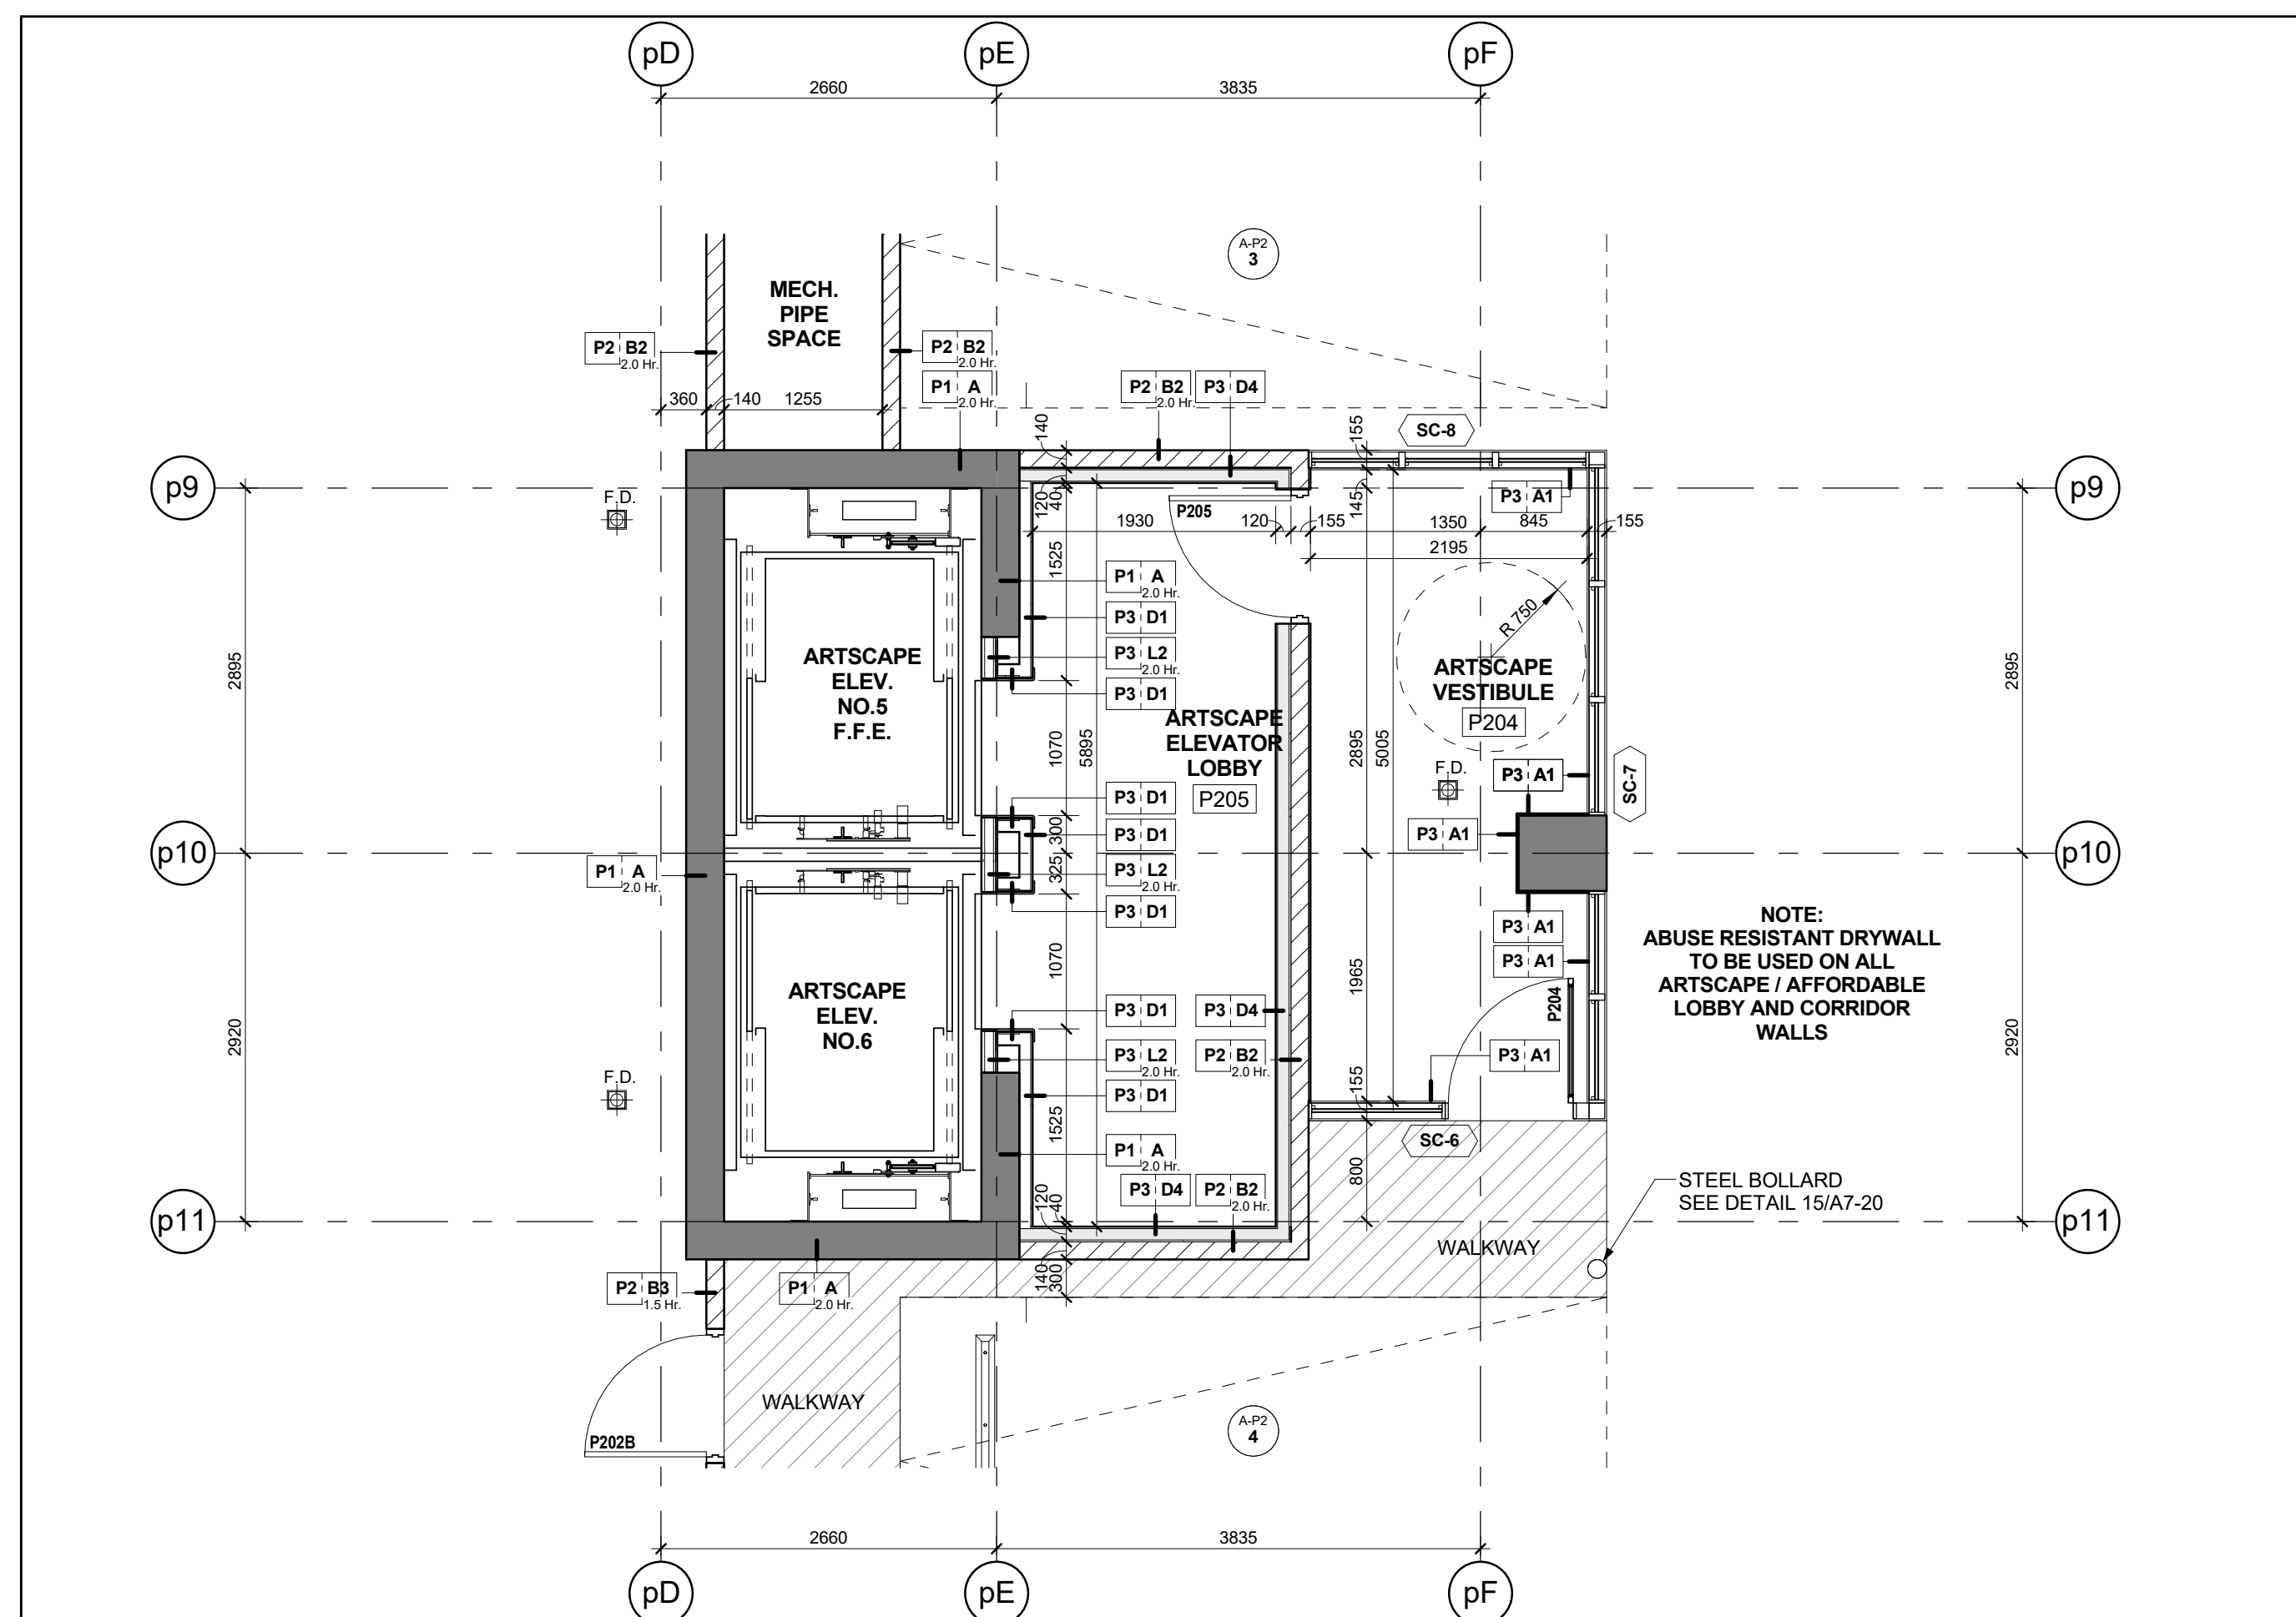


Level P2 - Underground Parking Garage - West Artscape Elevator Lobby

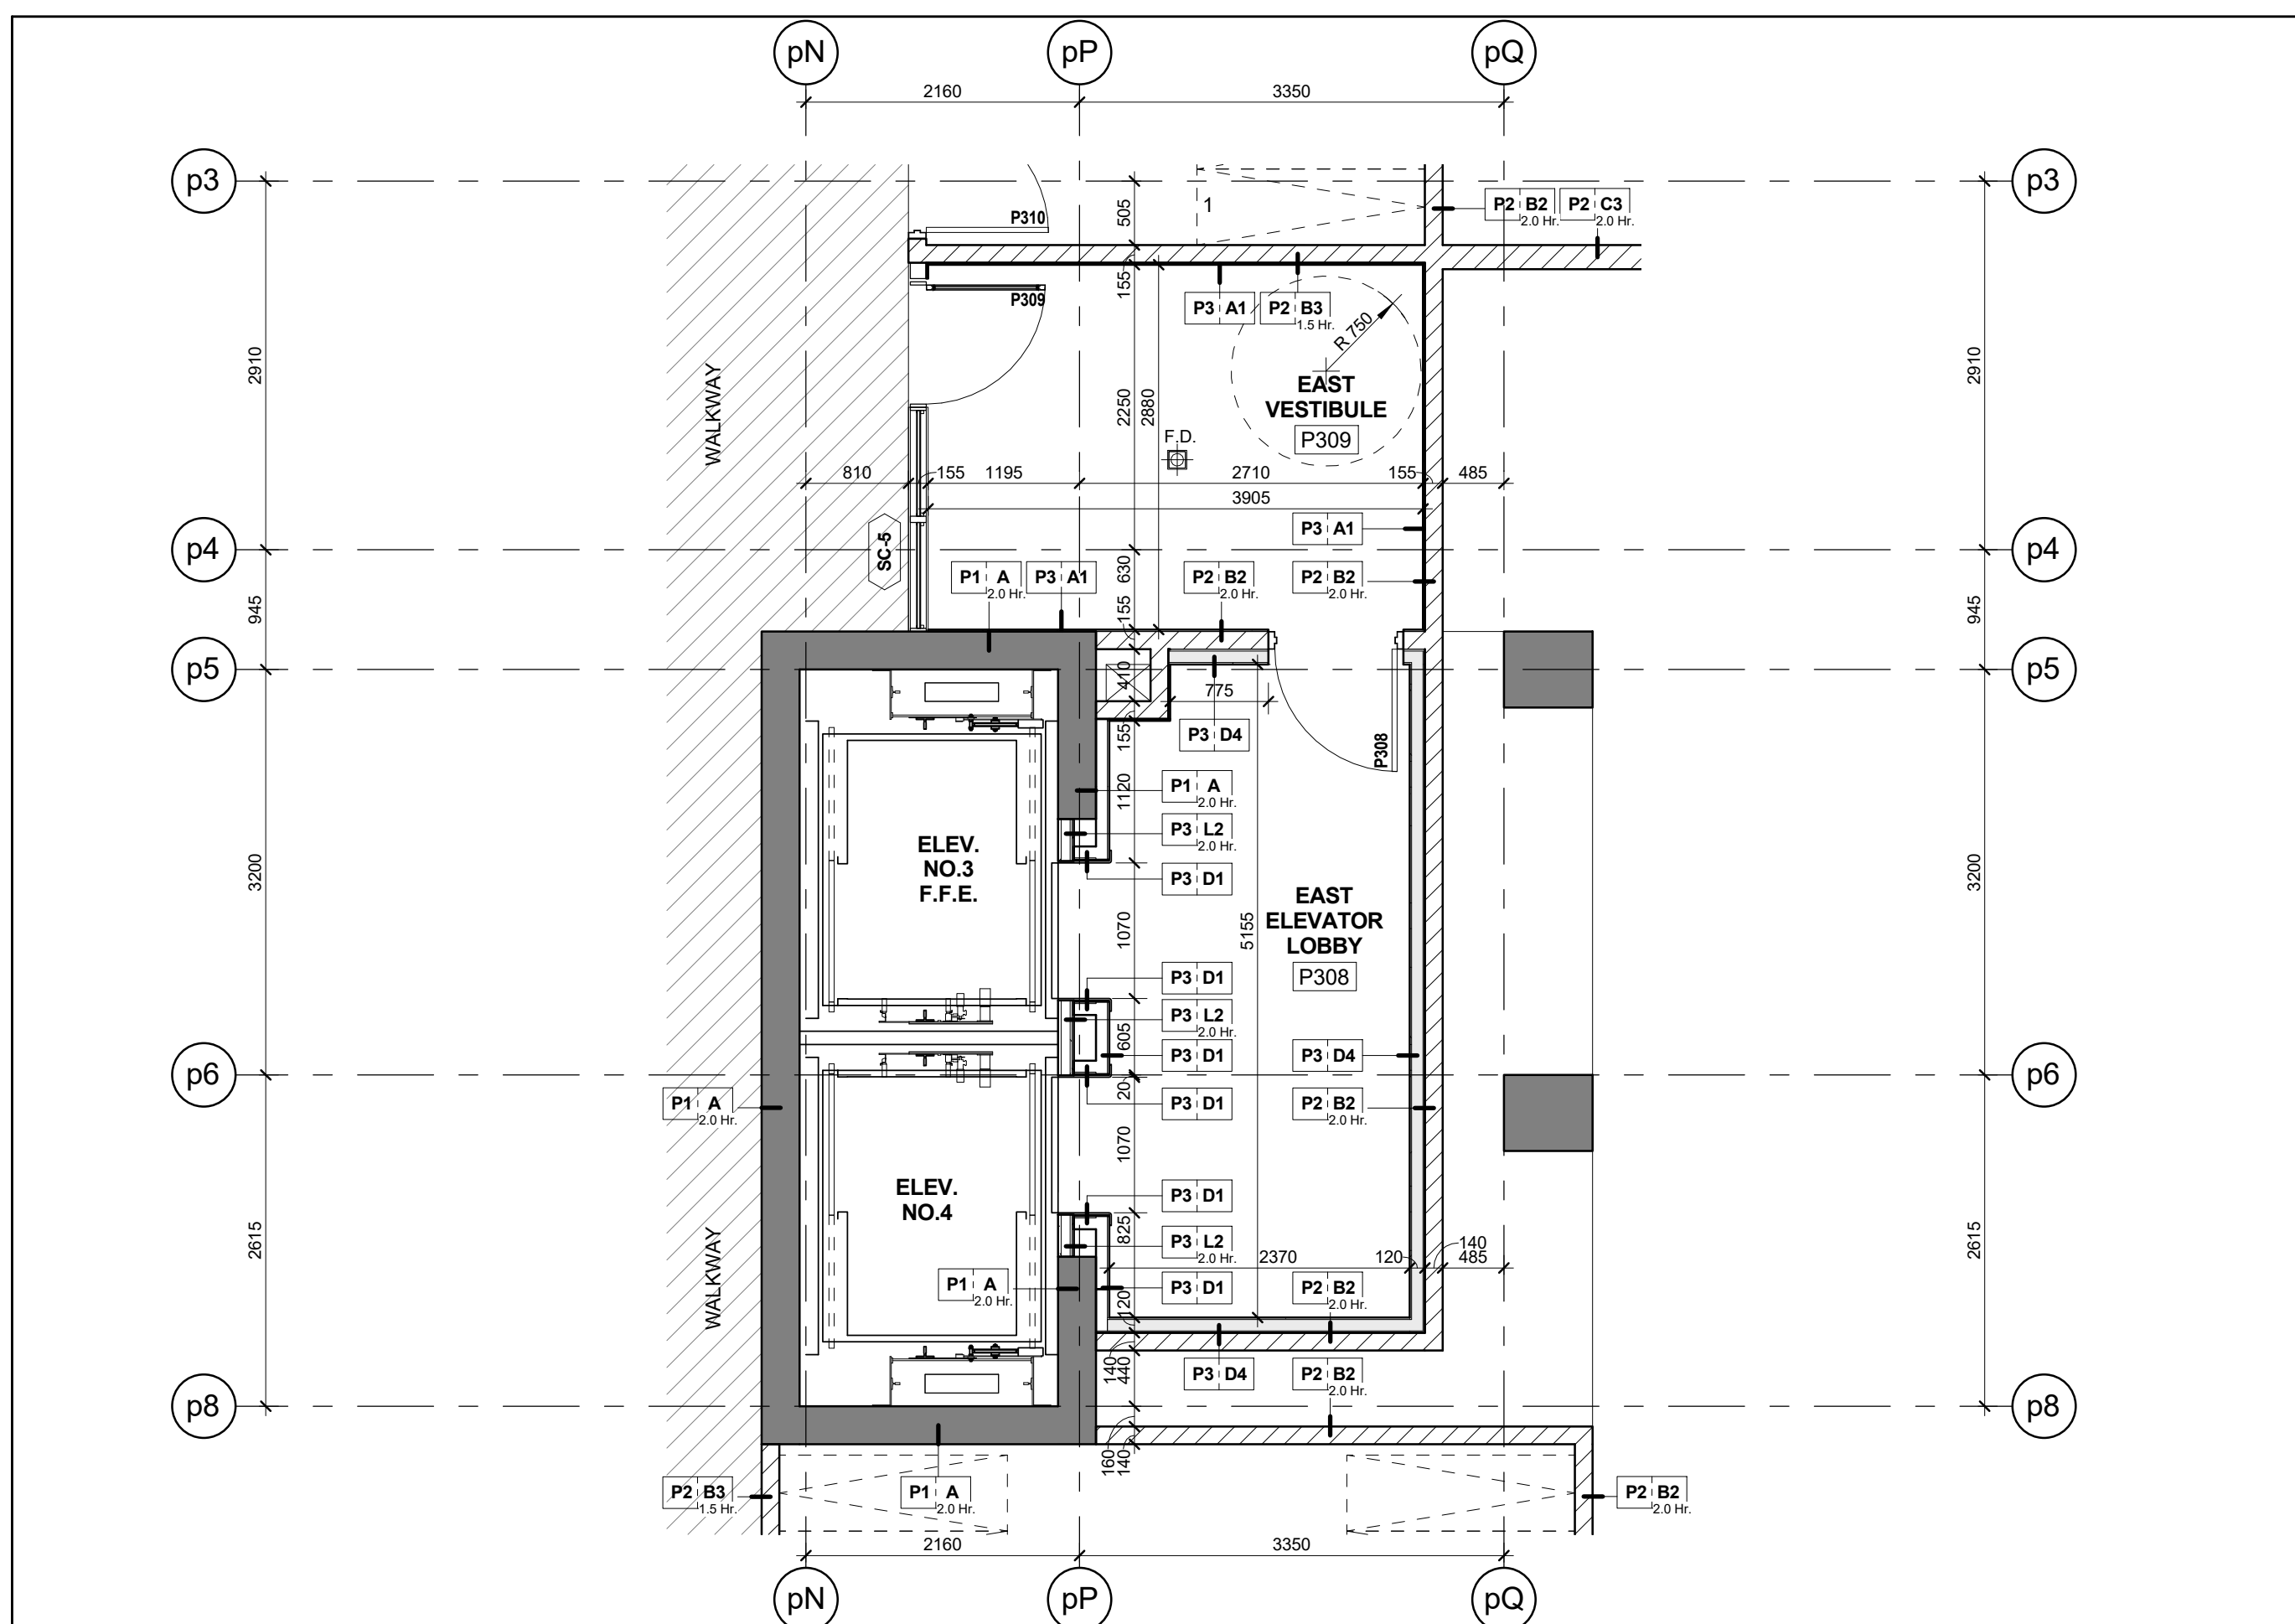


Level P3 - Underground Parking Garage - East Residential Elevator Lobby

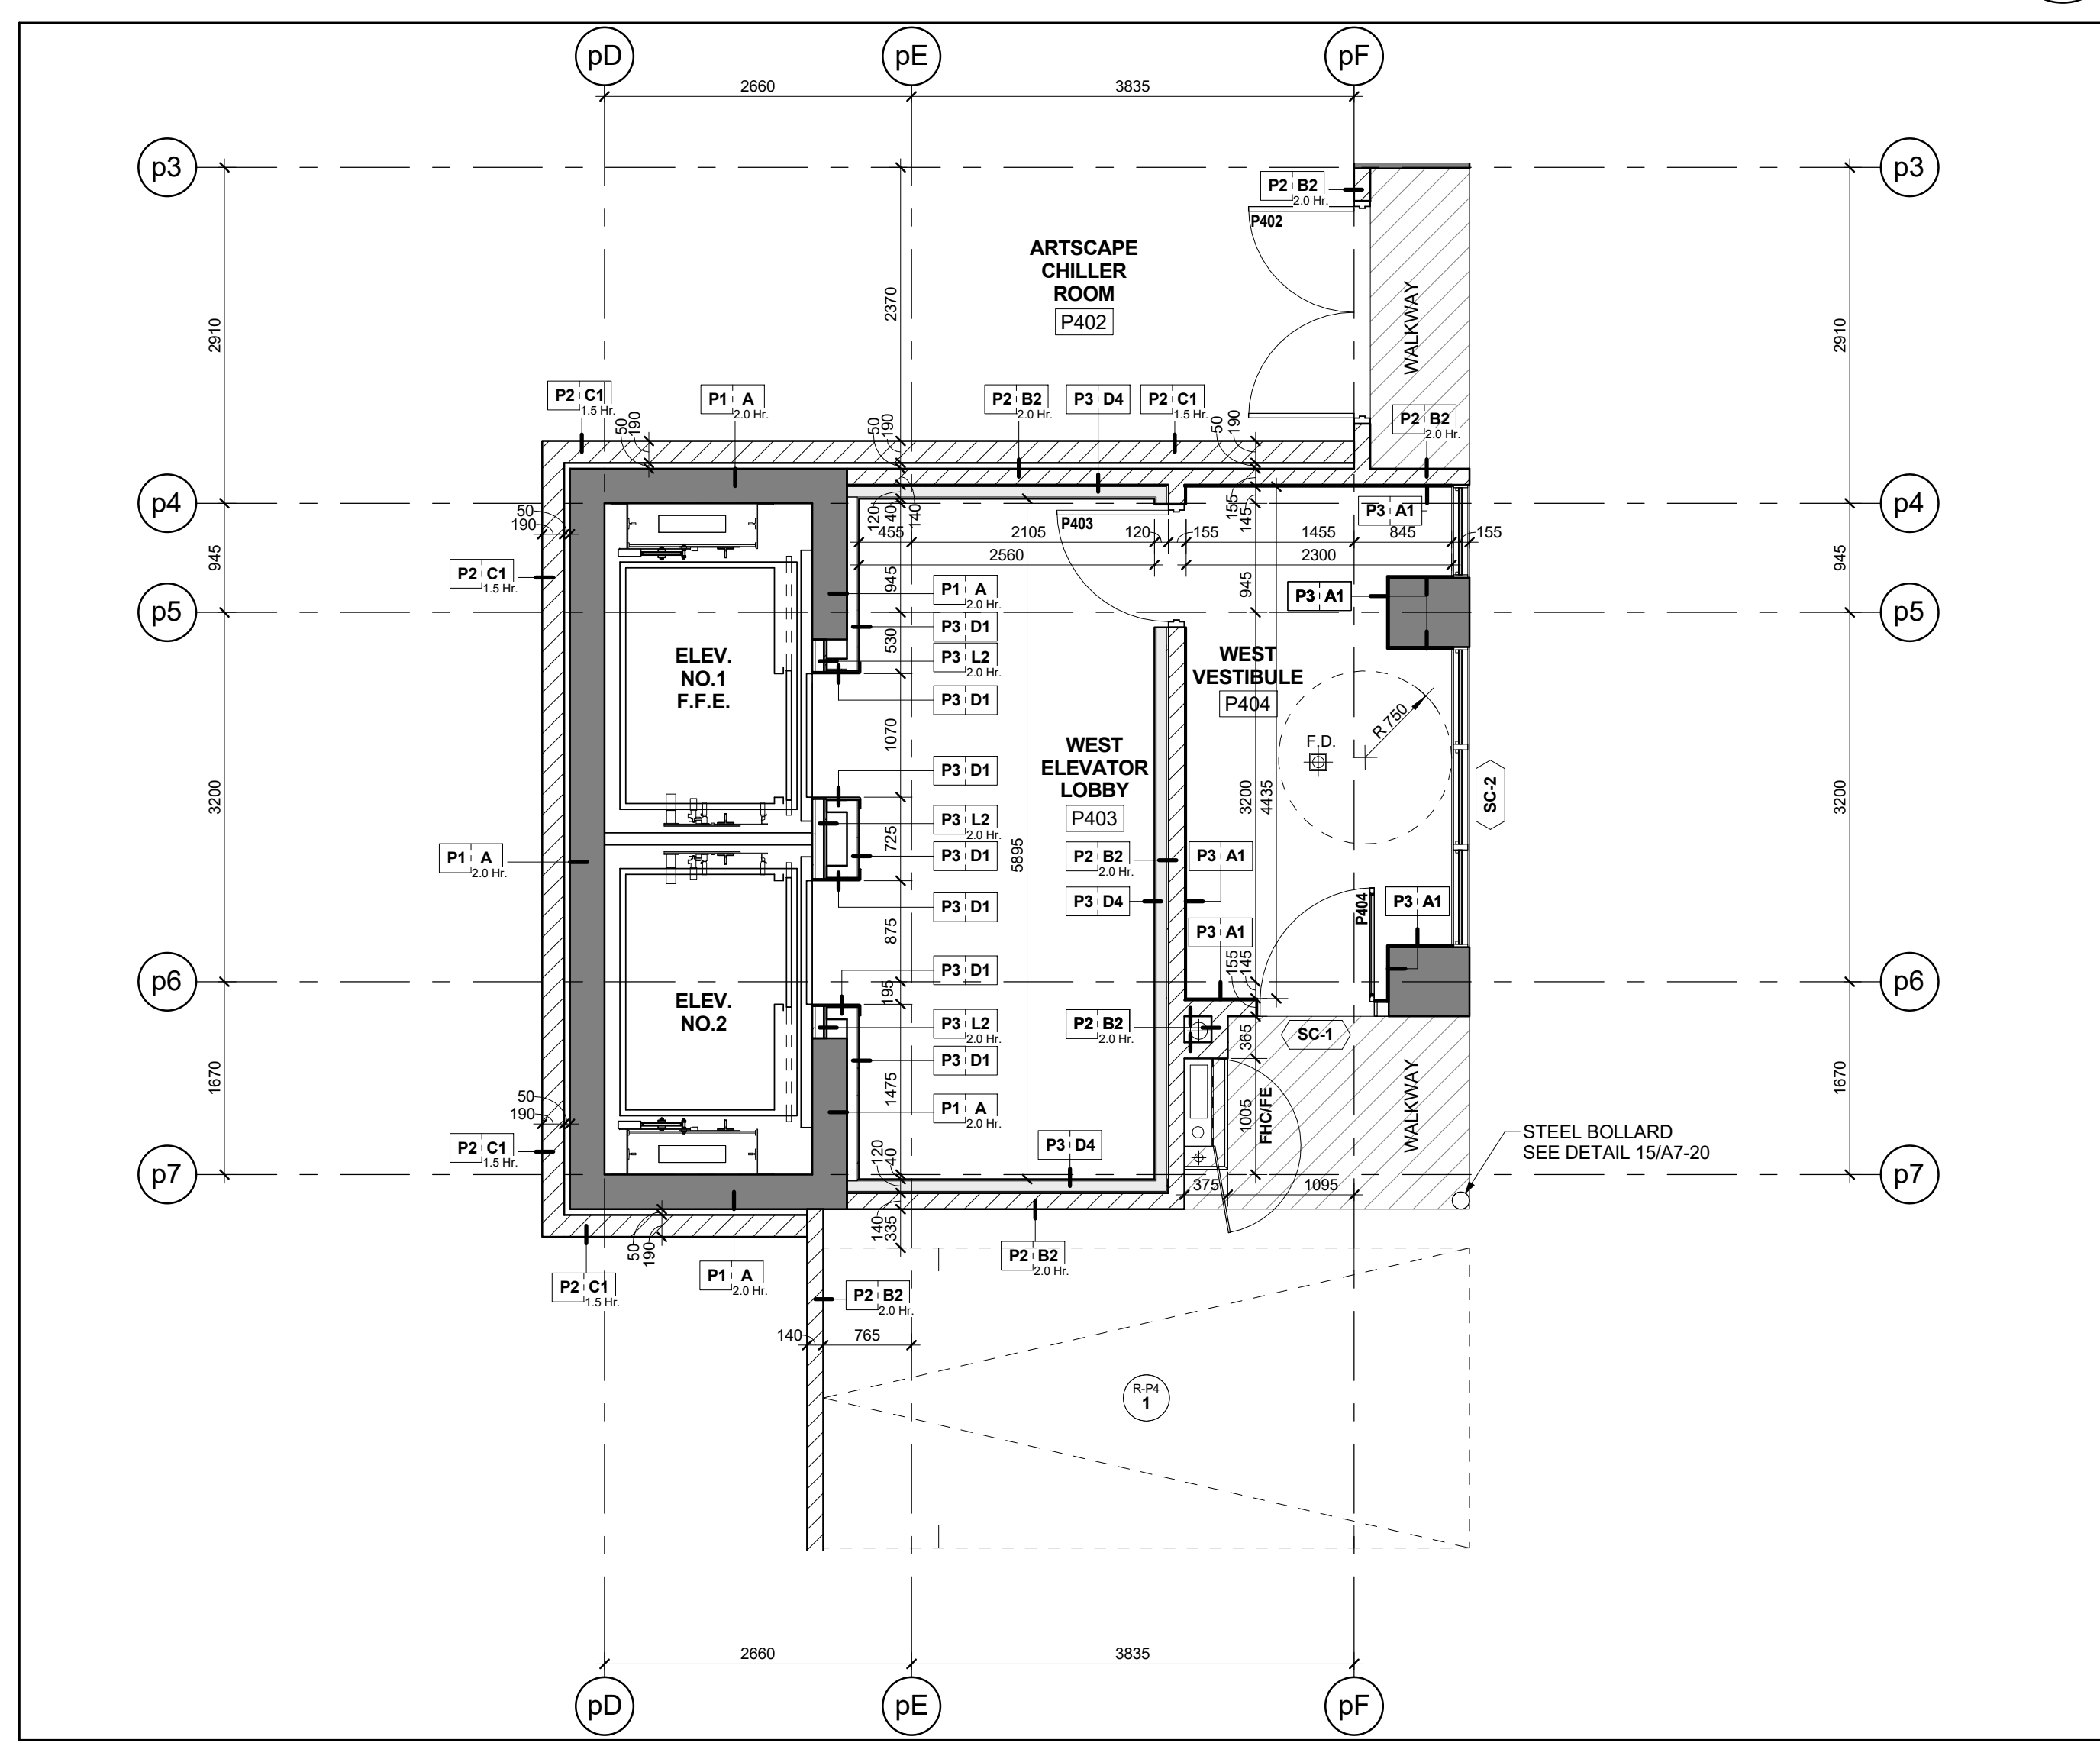


Level P3-P4 - Underground Parking Garage - West Residential Elevator Lobby

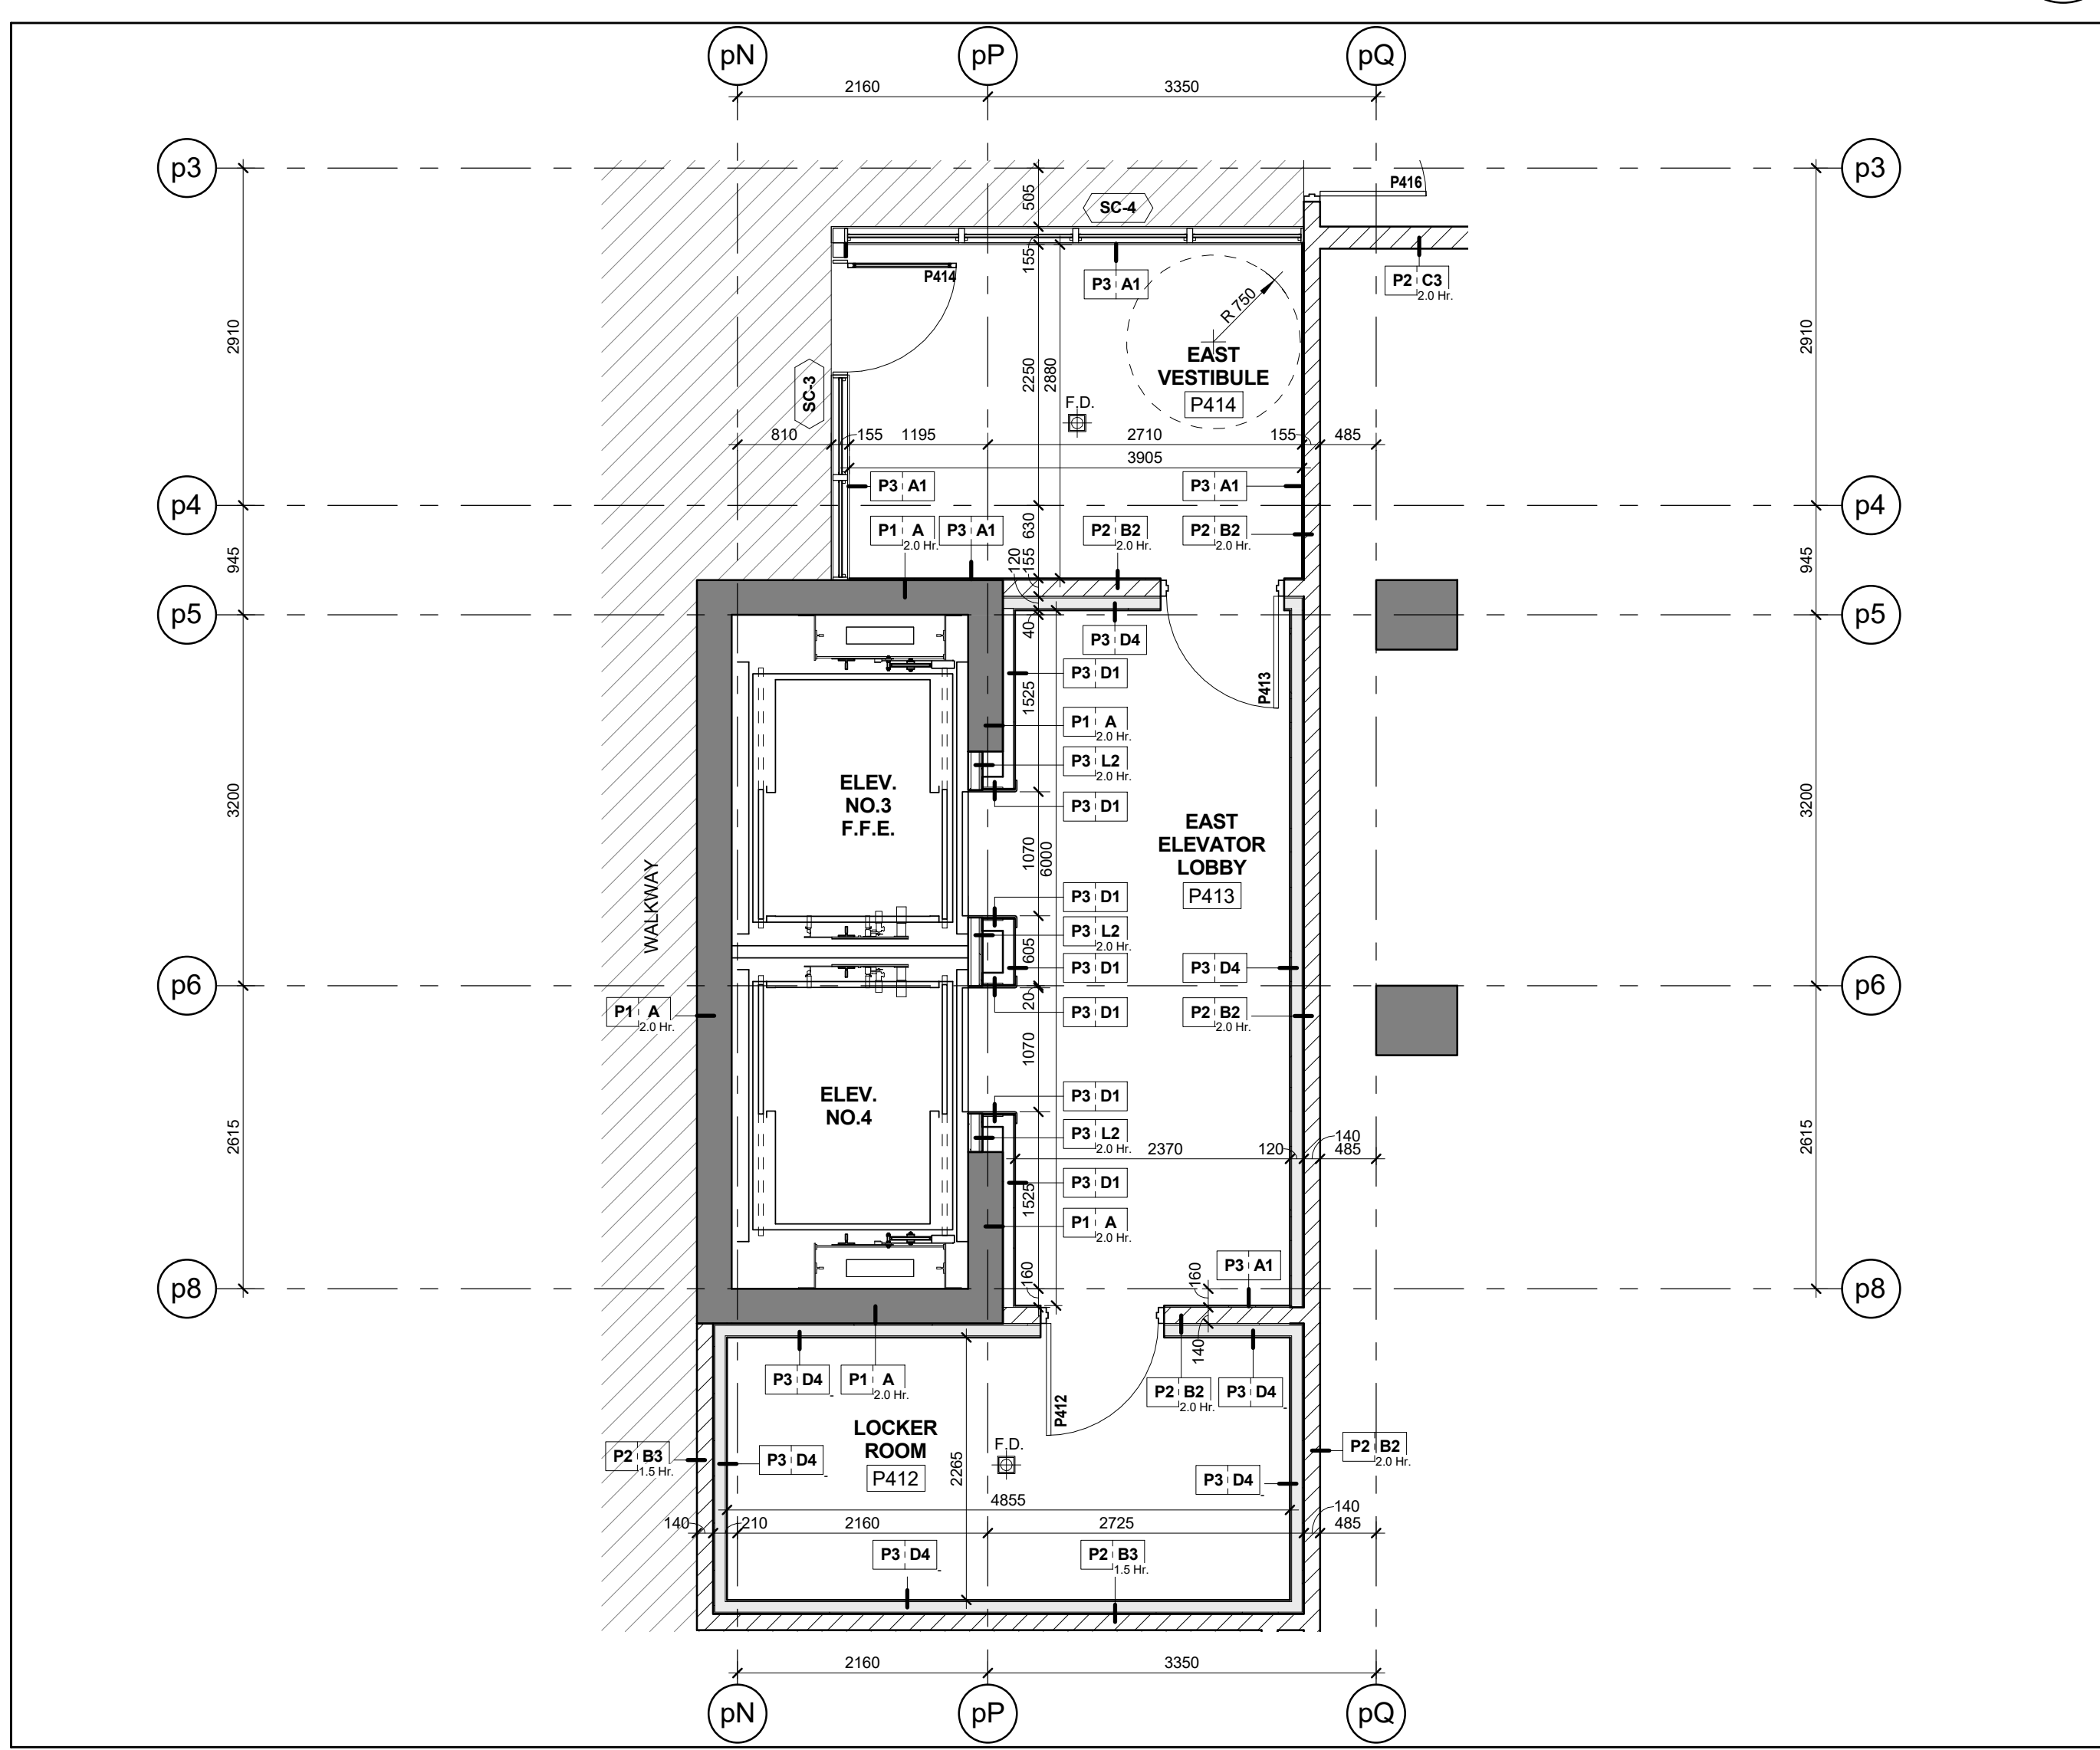

Level P4 - Underground Parking Garage - East Residential Elevator Lobby

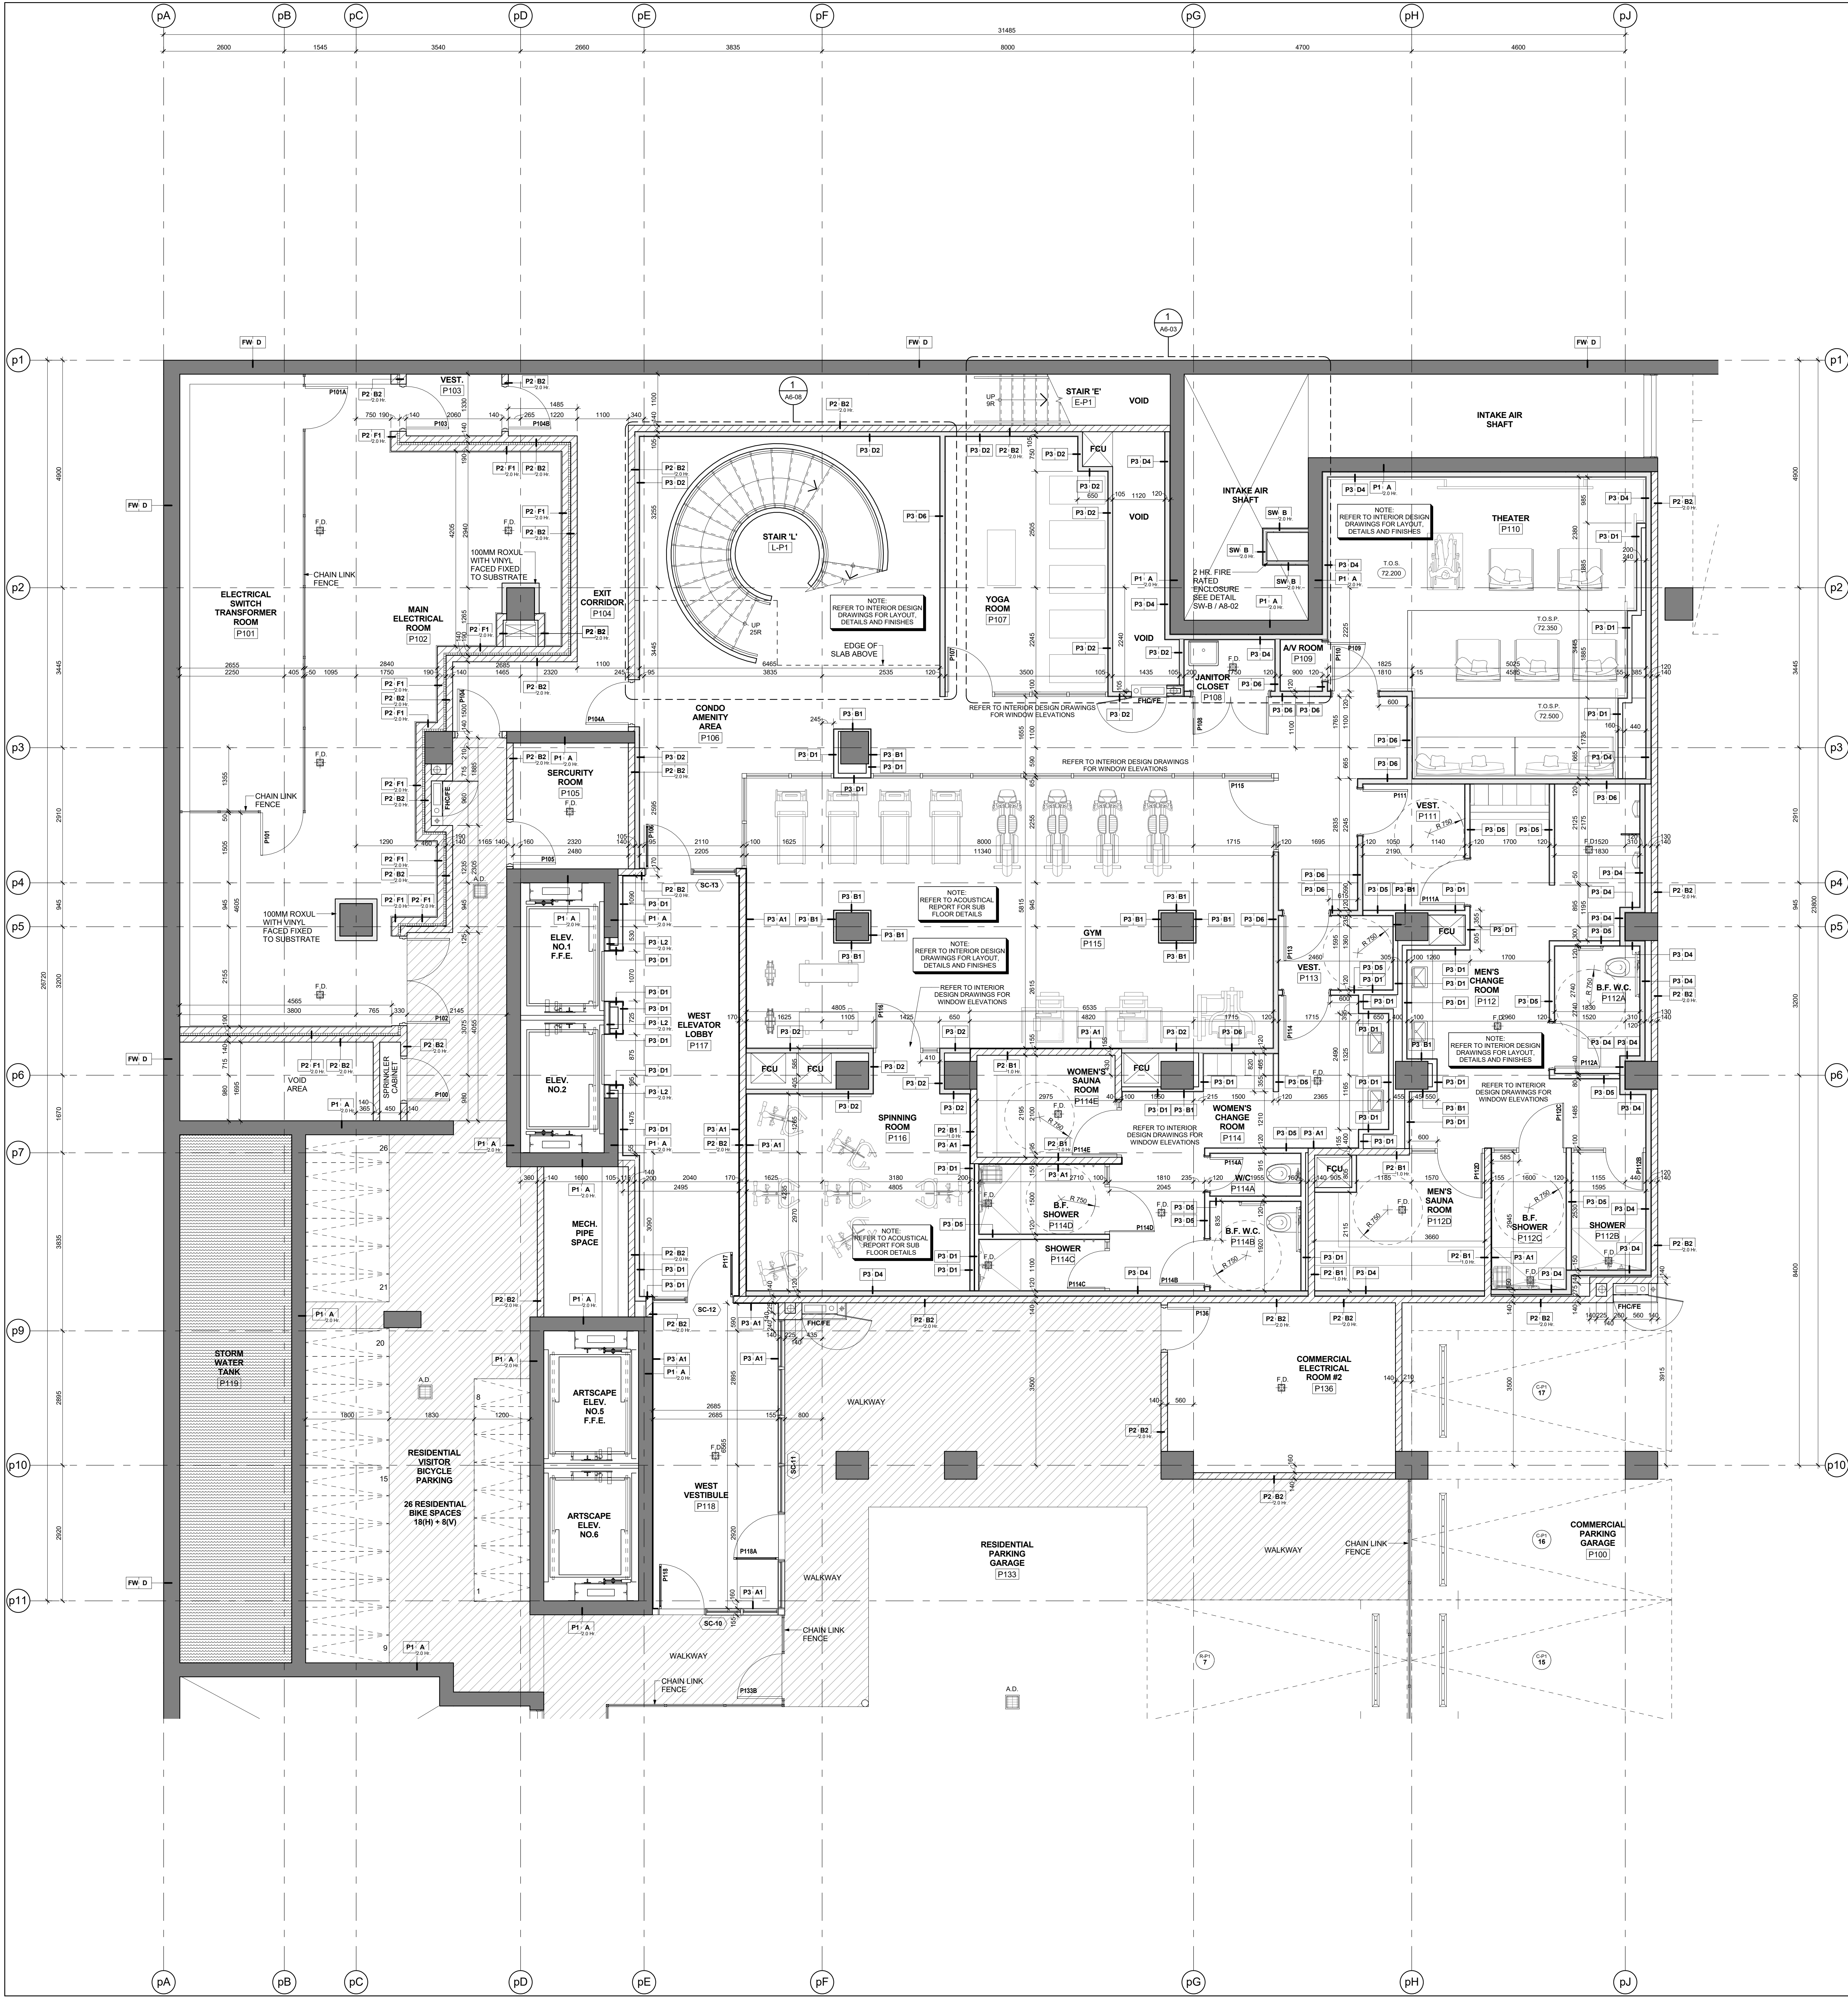

Level P1 - Underground Parking Garage - Partial Plan

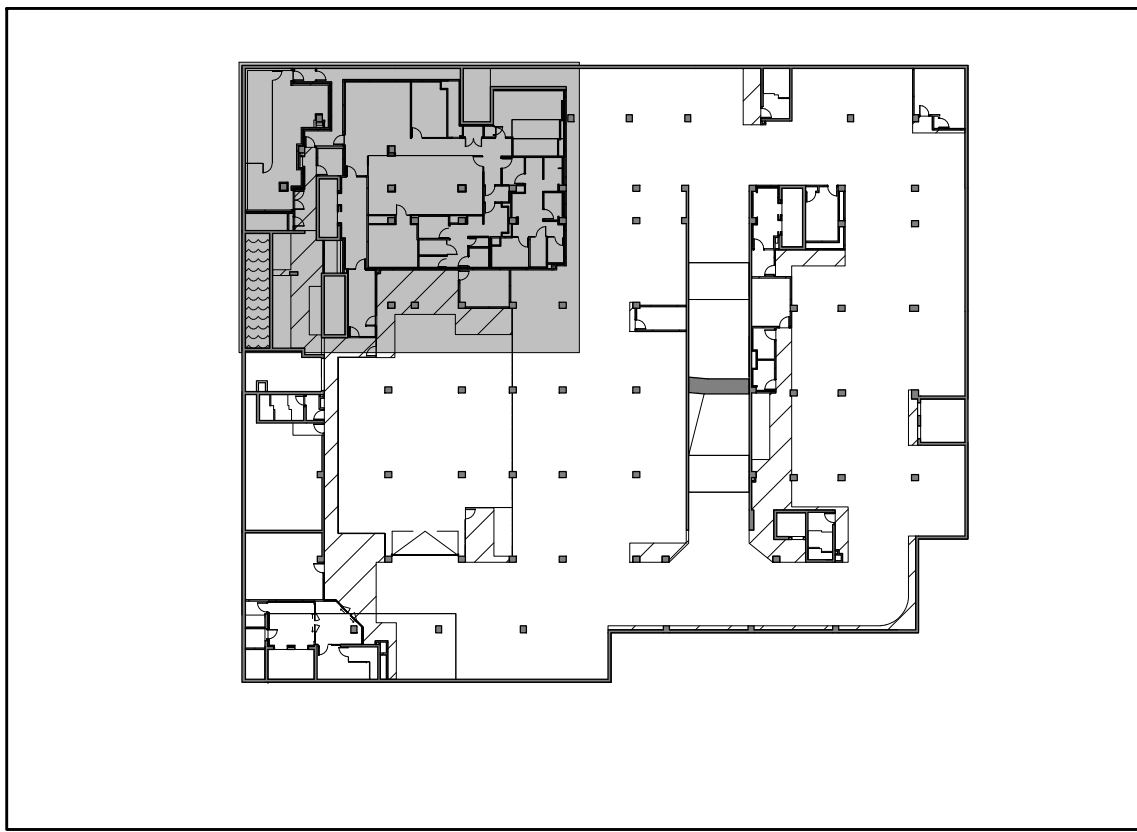

Key Plan Level P1 3
A3-01

GENERAL NOTES LEGEND

[illegible]

General Notes Legend 2
A3-01

GENERAL TYPICAL FLOOR NOTES

- 1. REFER TO INTERIOR DESIGN SPECIFICATIONS FOR INTERIOR FINISHES
- 2. PROVIDE 100% PROTECTION OF EXISTING SURFACES
- 3. BALCONY SLABS AND CONCRETE SLAB CONDITIONS TO BE SLOPED TO PROVIDE DRAINAGE TO EXISTING DRAINAGE SYSTEMS
- 4. PROVIDE BALCONIES WITH CURBS, ALL TERRACES TO HAVE SLOPERS, AND ALL EXISTING DRAINAGE TO HAVE SLOPES TO EXISTING DRAINAGE
- 5. PROVIDE APPROVED SOUND INSULATION FOR HORIZONTAL AND VERTICAL PENETRATIONS THROUGH SLABS AND PARTITIONS AS REQUIRED. REFER TO MECHANICAL DRAWINGS AND ACoustical RECORD
- 6. REFER TO WINDOW SCHEDULE FOR LOCATION OF WINDOW PENETRATIONS AND WINDOW SIZES
- 7. PROVIDE ALL FINISHED SURFACES AS REQUIRED FOR ELECTRICAL, MECHANICAL, AND PLUMBING INSTALLATIONS AND DETAILS.
- 8. COORDINATE WITH MECHANICAL AND ELECTRICAL DRAWINGS
- 9. ALL WALL PENETRATIONS SHALL BE PROTECTED BY FLASHING
- 10. ALL BALCONY KINGS TO BE CONSTRUCTED AS PER DETAIL
- 11. PROVIDE APPROVED ACoustical BATT INSULATION PER DETAIL
- 12. EXISTING WALLS SHALL BE REPAIRS TO MATCH EXISTING WALLS
- 13. EXISTING WALLS SHALL BE ALLOWED TO PENETRATE, OR PASS THROUGH, EXISTING WALLS
- 14. ELEVATOR:
 - A. PROVIDE WALL OMBITIONS PROVIDED BY THE ELEVATOR CONTRACTOR. A COPY OF THIS REPORT MUST BE OBTAINED FROM THE ELEVATOR CONTRACTOR AND SUBMITTED TO THE ARCHITECT WITH REVEALED ELEVATOR SHOWN DRAWINGS.
 - B. ELEVATOR TITLES SHALL BE CO-ORDINATED WITH ELEVATOR CONTRACTOR.
 - C. ELEVATOR TITLES SHALL BE CO-CONSTRUCTED TO PROVIDE A MIN. 10% RESISTANCE RATING OF 1.5 CLF
 - D. AN APPROVED REPAIR MATERIAL TO BE USED TO REPAIR INTERIOR WALLS OF ELEVATOR SHAFTS
 - E. ELEVATOR WALLS TO BE GALVANIZED STEEL AND EXTEND DOWNWARD 18" TO PROVIDE 18" OF PROTECTION TO THE WALLS BY THE GENERAL CONTRACTOR
- 15. LOCKER ROOMS:
 - A. ALL LOCKER AREAS SHALL BE TO 1500MM (5 FT). LOCKERS TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL WITH 10% OVERSIGHT. LOCKER DOORS TO BE 18" MIN. TO PROVIDE 18" OF PROTECTION TO BE 40MM (1 1/2") SPRINKLER DEFLECTOR THROUGHOUT
 - B. LOCKER ROOMS TO HAVE 100% PROTECTION TO THE WALLS BY THE GENERAL CONTRACTOR TO PROVIDE 18" (4 1/2") PROTECTION TO THE WALLS BY THE GENERAL CONTRACTOR
- 16. BICYCLE STORAGE:
 - A. ALL BICYCLE STORAGE TO COMPLY WITH TORONTO BICYCLE SHED STANDARDS (BICYCLE, INDOOR NADA 10000, 4 BICYCLES PER 100 SQ. FT.)
 - B. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - C. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - D. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - E. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - F. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - G. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - H. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - I. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - J. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - K. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - L. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - M. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - N. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - O. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - P. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - Q. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - R. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - S. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - T. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - U. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - V. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - W. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - X. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - Y. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
 - Z. ALL BICYCLE STORAGE TO BE CONSTRUCTED OF 12 GA. GALVANIZED STEEL
- 17. SUITE TO SUITE BLOCK TO BE USED NORMAL FLOOR FOR ACoustICS REPAIRS TO EXISTING WALLS

General Typical Floor Notes 1
A3-01