
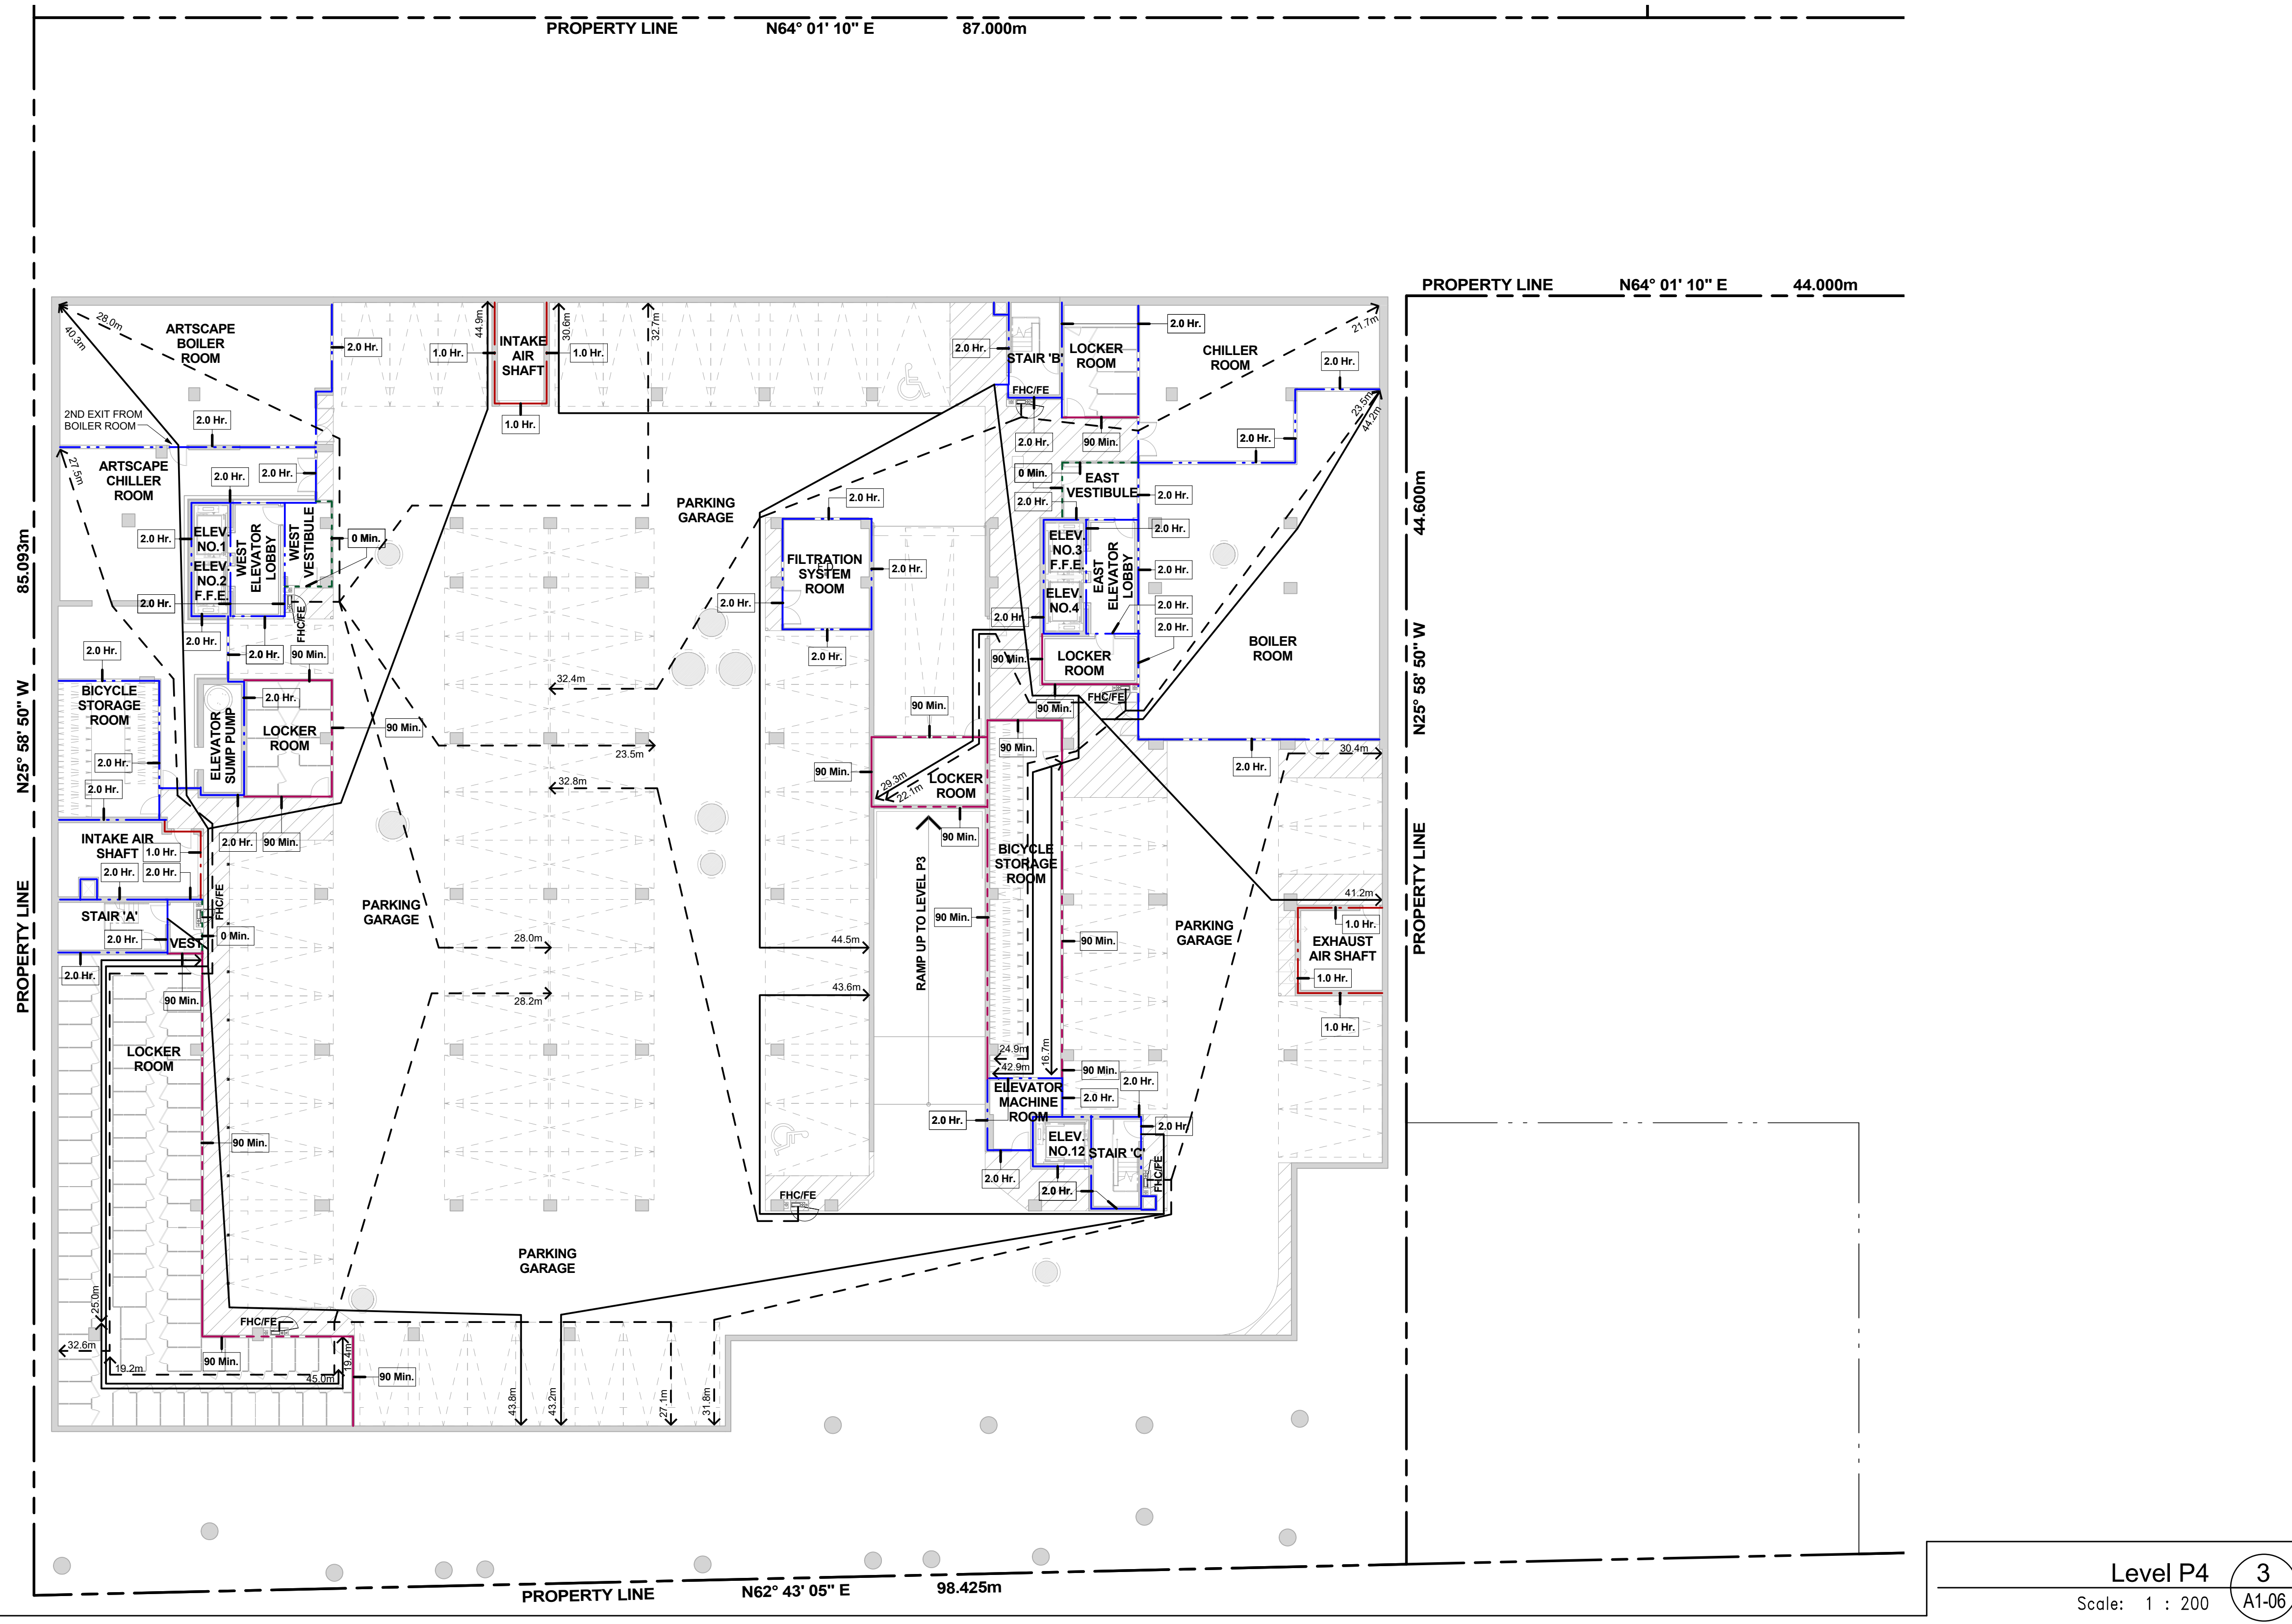
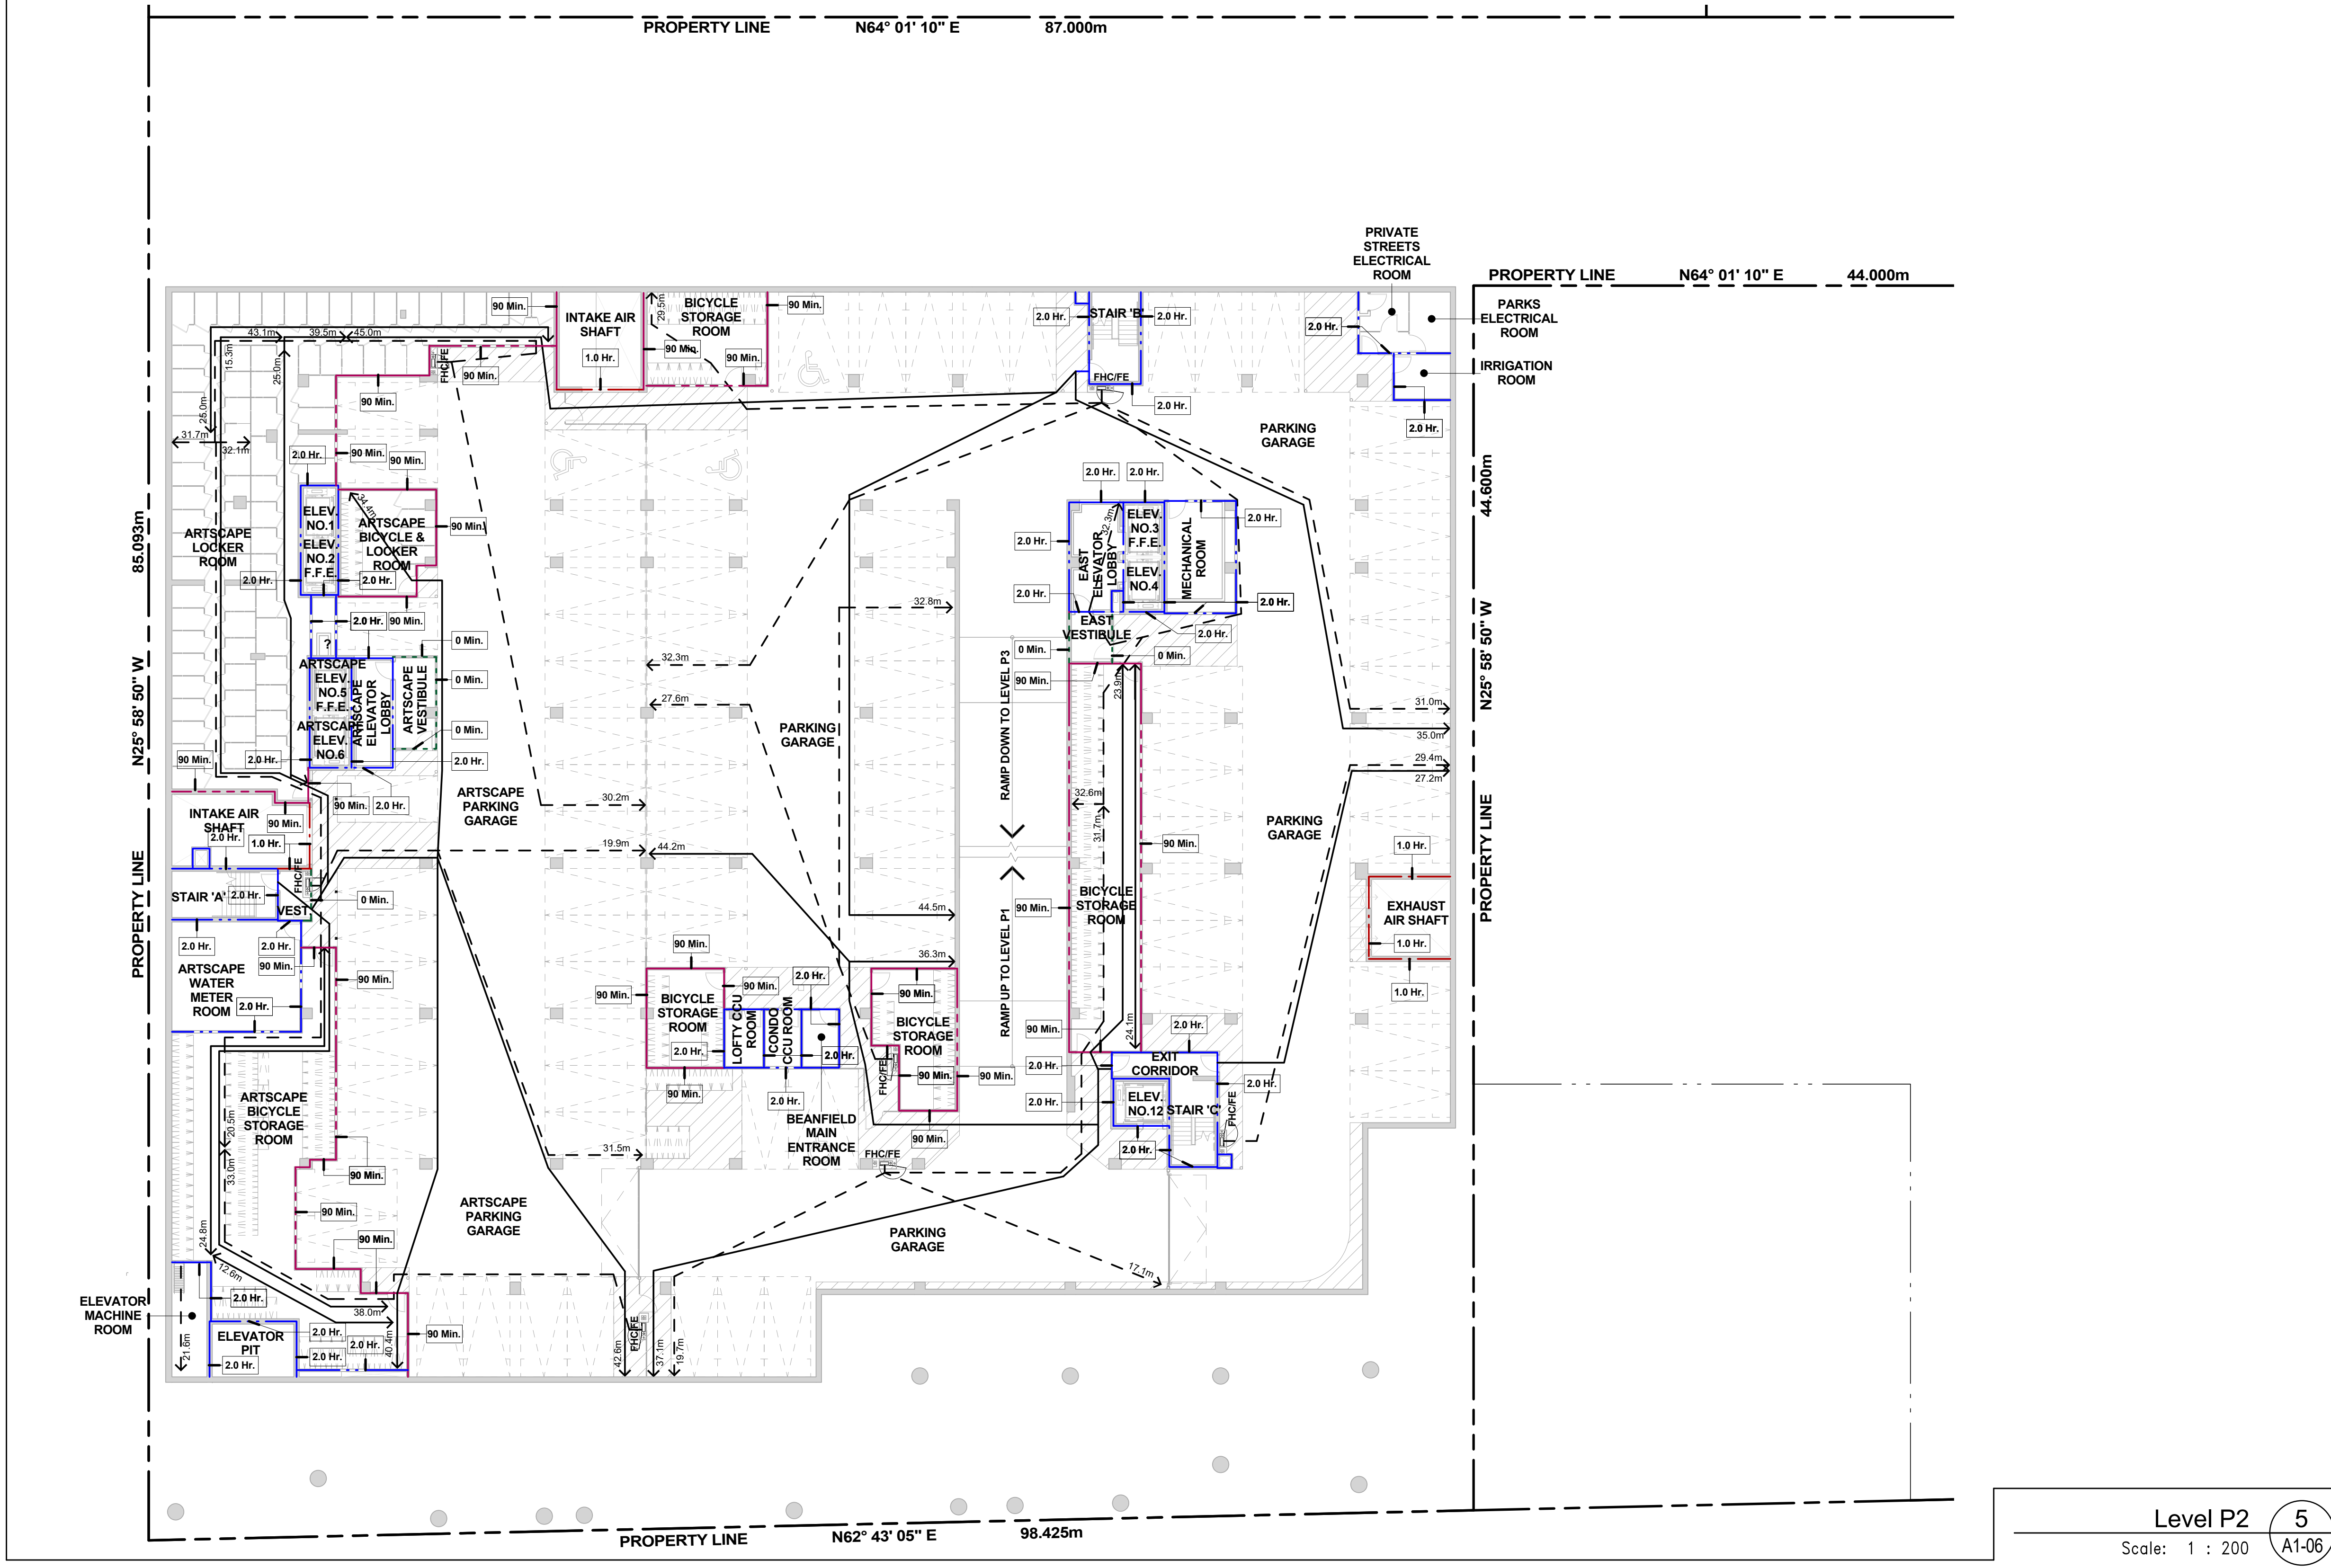
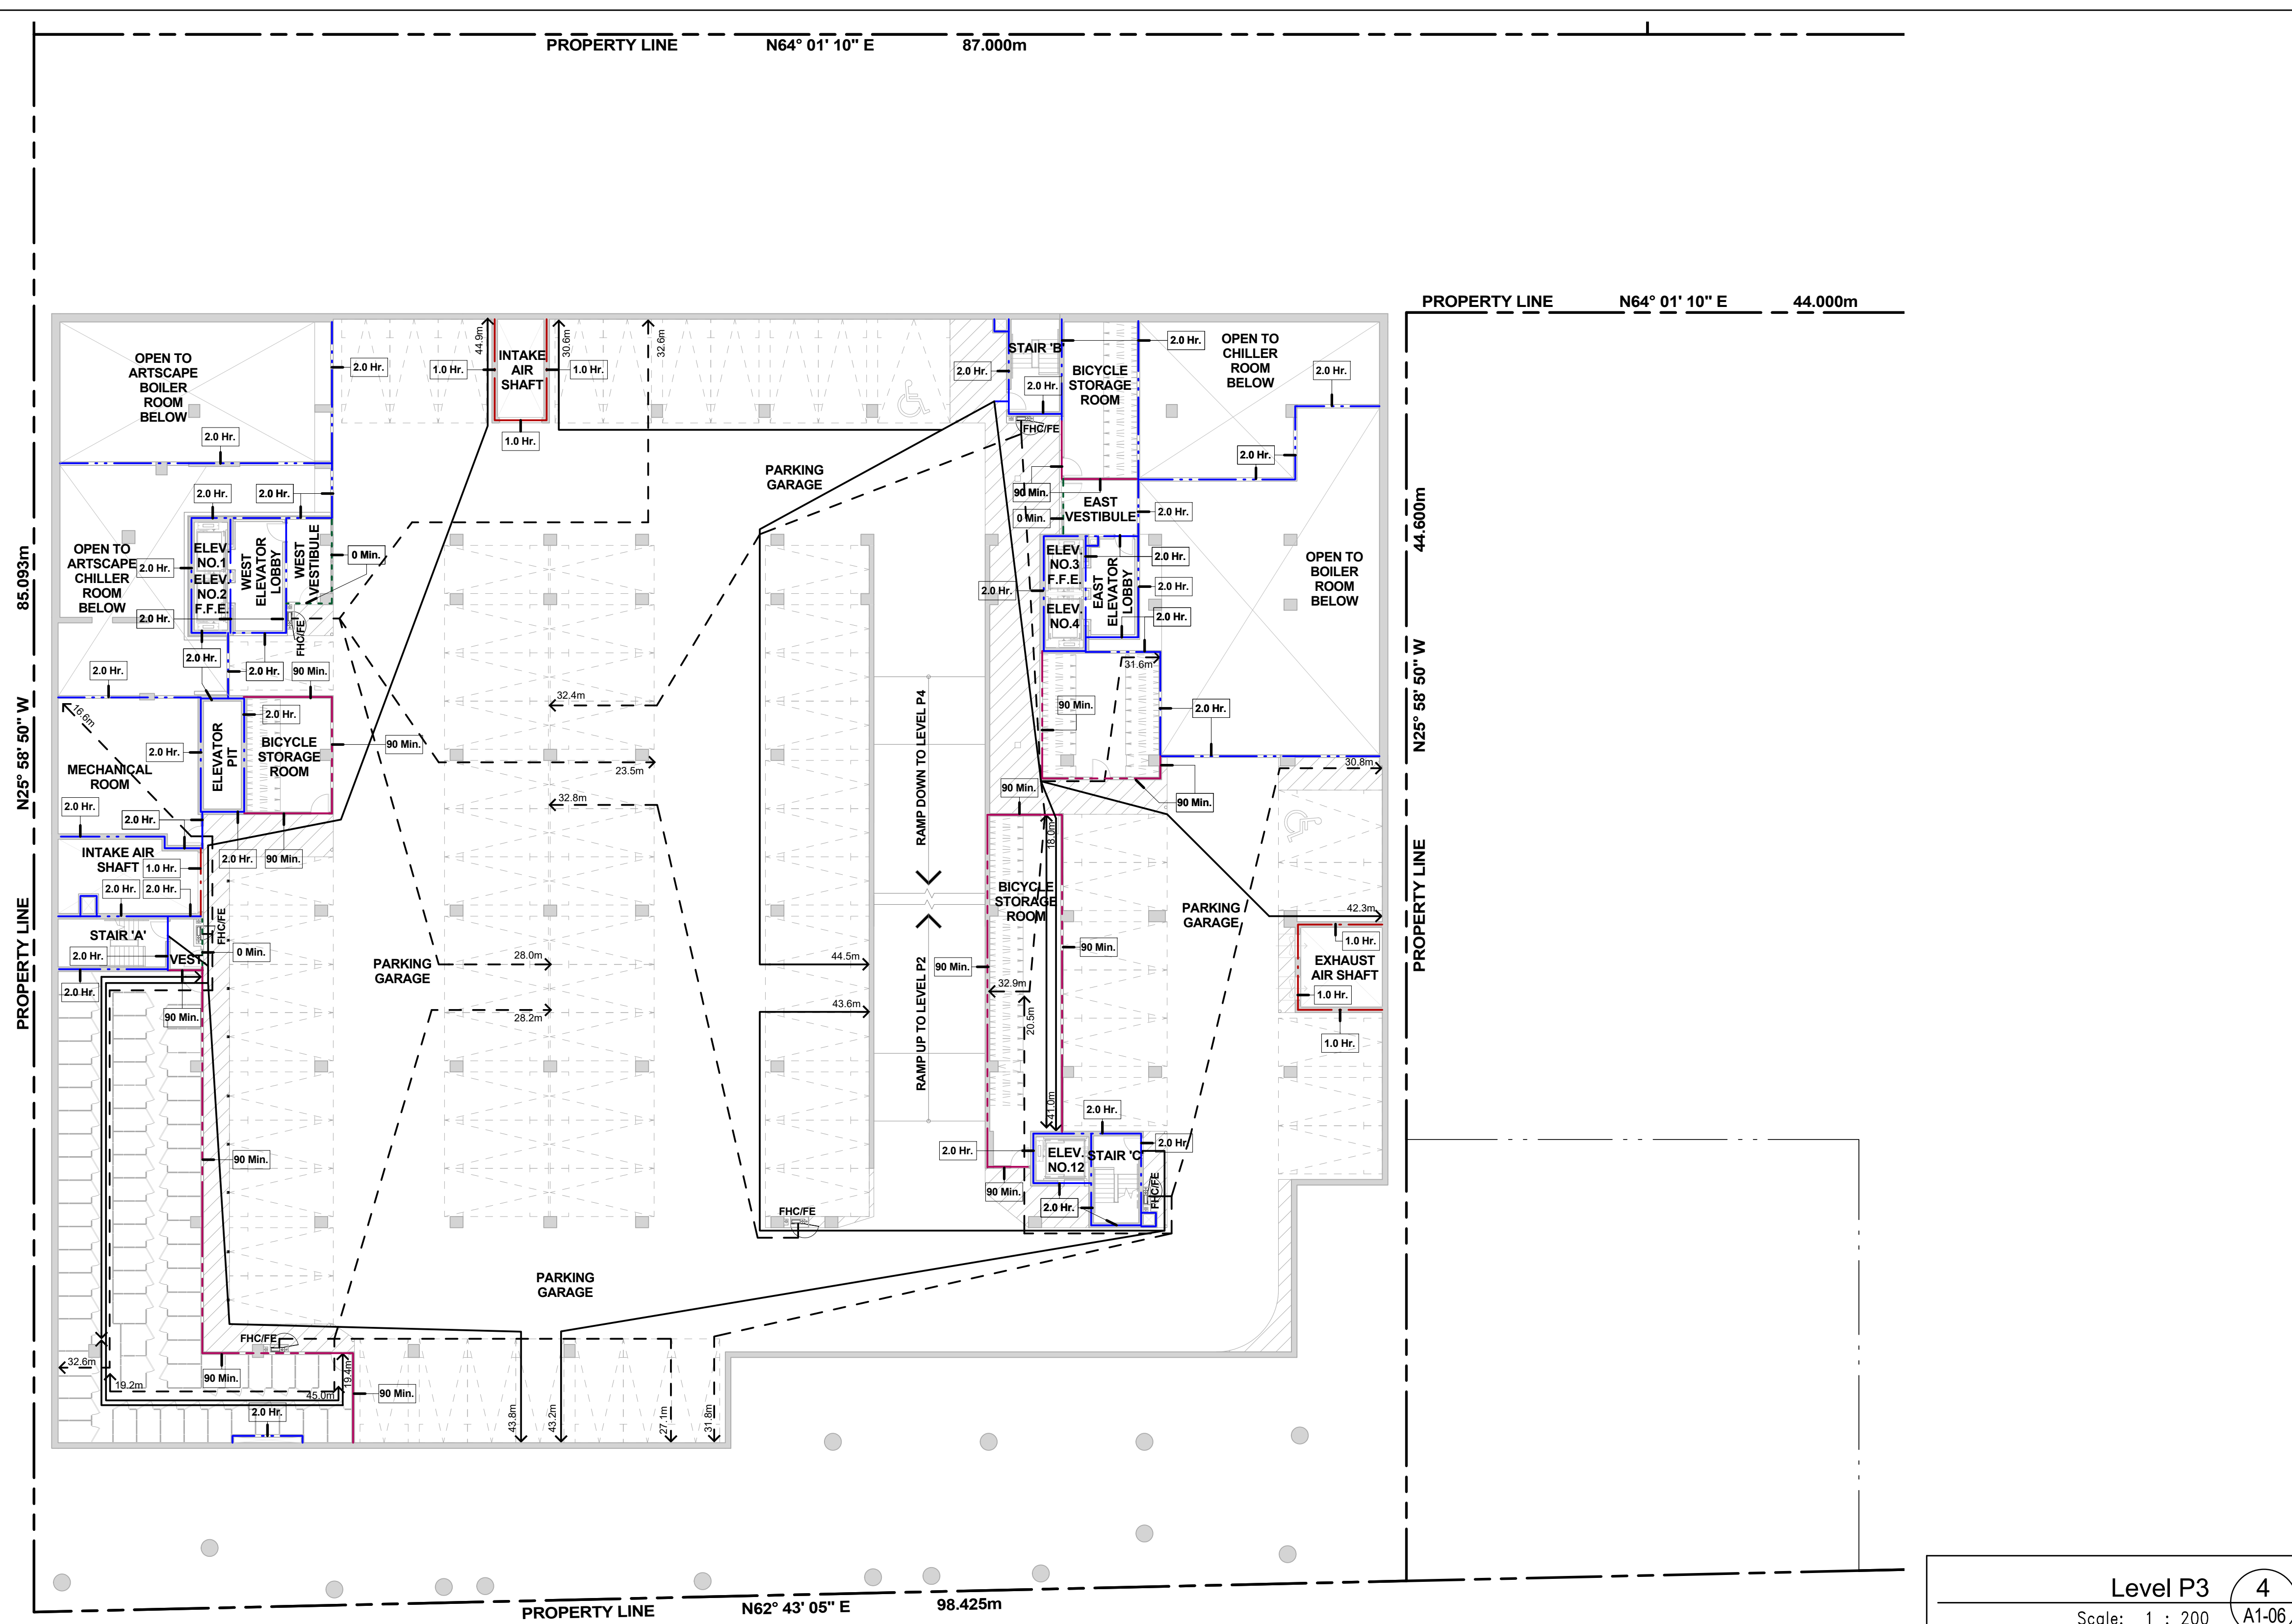


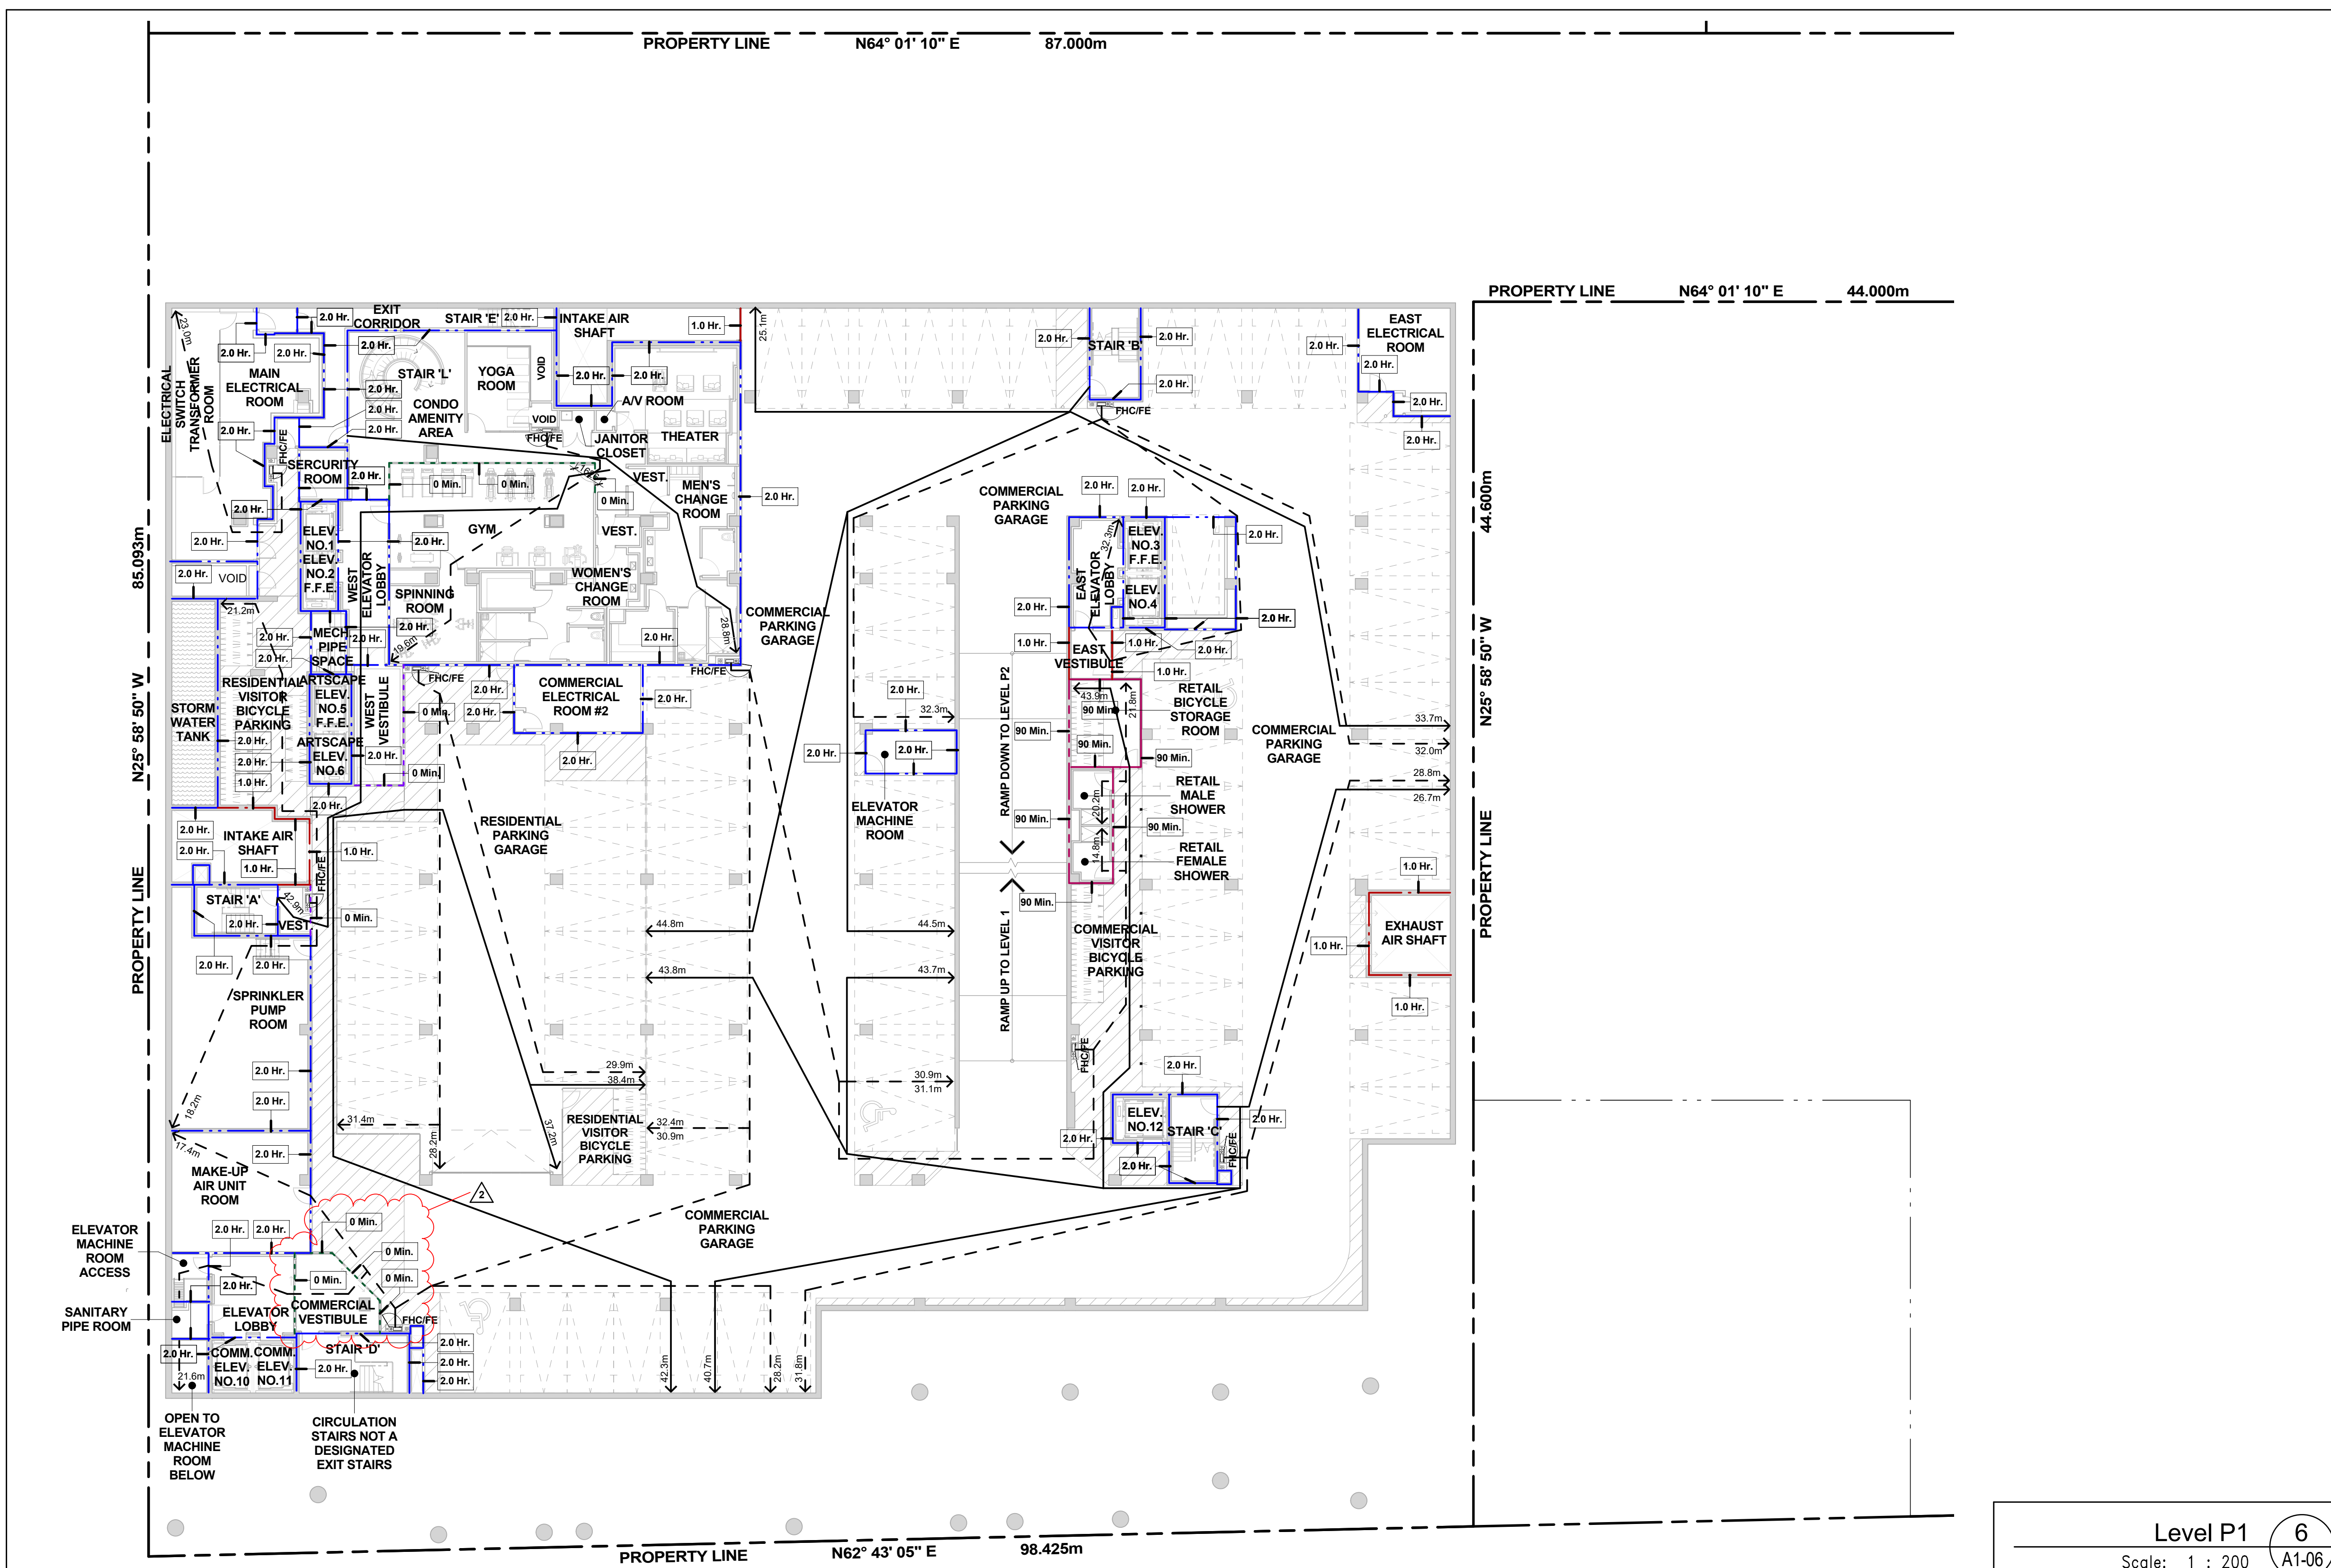

CODE COMPLIANCE LEGEND	
0 Mm	DENOTES FIRE SEPARATION HAVING A FIRE RESISTANCE RATING NOT LESS THAN 0 Mm
1 Mm	DENOTES FIRE SEPARATION HAVING A FIRE RESISTANCE RATING NOT LESS THAN 1 Mm
2 Mm	DENOTES FIRE SEPARATION HAVING A FIRE RESISTANCE RATING NOT LESS THAN 2 Mm
3 Mm	DENOTES FIRE SEPARATION HAVING A FIRE RESISTANCE RATING NOT LESS THAN 3 Mm
4 Mm	DENOTES FIRE SEPARATION HAVING A FIRE RESISTANCE RATING NOT LESS THAN 4 Mm
5 Mm	DENOTES FIRE SEPARATION HAVING A FIRE RESISTANCE RATING NOT LESS THAN 5 Mm
XXm	DENOTES FIRE HOSE CABINET HOSE LENGTH 30m + 3m HOSE STREAM
XXm	DENOTES TRAVEL DISTANCE 30m MAXIMUM
XXm	DENOTES DEAD END CORRIDORS 3m MAXIMUM

Code Compliance Legend 2	
A1-06	

GENERAL PARKING LEVEL NOTES	
1.	FOR ALL PARKING SPACES, SEE MECHANICAL DRAWINGS FOR VENTILATION, LIGHTING, LEVELS, ETC. SEE NOTES "STORAGE GARAGE CONFORMANCE REQUIREMENTS" ON DRAWING A-1.
2.	ELEVATOR: A. ELEVATOR SHAFT ENCLOSURES PROVIDED BY THE ELEVATOR CONSTRUCTION AND ADOPTED FROM THE ELEVATOR CONSTRUCTION DRAWINGS SHALL BE CO-ORDINATED WITH THE ELEVATOR SHOP DRAWINGS. THESE REQUIREMENTS WITH RELEVANT ELEVATOR SHOP DRAWINGS SHALL BE CO-ORDINATED WITH THE ELEVATOR SHOP DRAWINGS. B. ELEVATOR PIT SHALL BE CO-ORDINATED WITH ELEVATOR SHOP DRAWINGS. C. ELEVATOR SHAFT WALLS SHALL BE CONSTRUCTED TO ACHIEVE AN MINIMUM FIRE RESISTANCE RATING OF 2 HOURS. PROVIDE ELEVATOR TO BE CONSTRUCTED TO ACHIEVE AN MINIMUM FIRE RESISTANCE RATING OF 2 HOURS. PROVIDE ELEVATOR TO BE CONSTRUCTED TO ACHIEVE AN MINIMUM FIRE RESISTANCE RATING OF 2 HOURS. D. AN APPROVED FIRE STOP MATERIAL IS TO BE USED TO SEAL ANY PENETRATIONS THROUGH CONCRETE BLOCK OR MASONRY WALLS. E. ELEVATOR PIT LADDERS TO BE GALVANIZED STEEL AND EXTEND 100MM ABOVE GALL. LADDERS TO BE SUPPLIED AND INSTALLED BY GENERAL CONTRACTOR. F. REFER TO EXTERIOR DESIGN DRAWINGS FOR VESTIBULES, ELEVATOR LOBBIES, INTERIOR FINISHES AND SPECIFICATIONS. G. ALL AIR SHWTS SHALL HAVE 2% SLOPE TOWARDS DRAIN. H. ELEVATOR PIT SHOULD HAVE 2% SLOPE TOWARDS DRAIN. I. PROVIDE DRAINAGE CHANNEL TO ALL CORNERS OF COLUMNS AND CONCRETE WALLS. J. ALL SUBPITS TO BE PRECAST WITH AIR TIGHT FRAME AND COVER. K. FOR SAW CUT PATTERNS, REFER TO STRUCTURAL DRAWINGS. L. FOR UNDER FLOOR DRAINAGE SEE MECHANICAL DRAWINGS. M. UNLESS OTHERWISE NOTED, ALL PARKING SPACES ARE 20M X 5.5M. CORRIDOR WIDTHS 3M AND ALL DRIVEWAY SPACES ARE 10M X 5.5M. N. PROVIDE INSULATED HEATED FLOOR TO UNDERSIDE OF GROUND FLOOR AS INDICATED BY SHADING AREA. O. PROVIDE REINFORCED NON-COMBUSTIBLE REINFORCEMENT TO USE OF NON-FERROUS MATERIALS TO BE PROVIDED BY SHADING AREA. P. PROVIDE TRAFFIC TYPING ON LEVELS P1, P2, AND P3 AS SPECIFIED. RELAY CONNECTS TO LATEST TRAFFIC TYPING SYSTEM. AT ALL CORNERS FROM PARKING GARAGE TO CANADA AREA 3 CORNER ROOMS, LOBBIES AND INTERIORS, PROVIDE COLUMN REINFORCEMENT TO ACCOMMODATE TRAFFIC TYPING. PROVIDE TRAFFIC TYPING FROM PARKING GARAGE TO MECHANICAL ROOMS. PROVIDE TRAFFIC TYPING AS REQUIRED. Q. FOR EXTERIOR AND INTERIOR LOBBY AND LOCATION WITH MECHANICAL, ELECTRICAL AND LOCKER ROOMS REFER TO MECHANICAL AND ELECTRICAL DRAWINGS. R. FOR SHORING AND CARBON WALL LOCATION AND DETAILS REFER TO DRAWINGS PREPARED BY SHORING ASSOCIATES. S. PROVIDE PAINTED BLUE 80MM WIDE BAND, 80MM A.F.F. AT ALL COLUMN LOCATIONS AND PROVIDE 100MM WIDE BAND, 100MM A.F.F. AT ALL COLUMN LOCATIONS FOR LOCATIONS. ARCHITECT AND ENGINEER TO APPROVE COLOUR. T. LOCKER ROOM NOTES: U. ALL LOCKER ROOMS TO BE 1000mm (TOP) x 1000mm (SIDE) x 1000mm (HEIGHT) WITH REINFORCED MASONRY 100mm HIGH. PROVIDE WIRE MESH DOOR AND CEILING. ALL FIRE RESISTANCE RATING SHALL BE 2 HOURS. V. PROVIDE LOCKER ROOM LAYOUT PREPARED BY ARCHITECT AND INSTALLER TO PROVIDE INSTALLATION SHOP DRAWINGS FOR REVIEW BY OWNER AND ARCHITECT. W. BICYCLE SPACE NOTES: X. ALL BICYCLE SPACES TO COMPLY WITH TORONTO BICYCLE PARKING STANDARDS. PROVIDE BICYCLE PARKING SPACES TO BE 1000mm (TOP) x 1000mm (SIDE) x 1000mm (HEIGHT) WITH REINFORCED MASONRY 100mm HIGH. PROVIDE WIRE MESH DOOR AND CEILING. ALL FIRE RESISTANCE RATING SHALL BE 2 HOURS. Y. AT ALL CORNERS FROM PARKING GARAGE TO CANADA AREA 3 CORNER ROOMS, LOBBIES AND INTERIORS, PROVIDE COLUMN REINFORCEMENT TO ACCOMMODATE TRAFFIC TYPING. PROVIDE TRAFFIC TYPING FROM PARKING GARAGE TO MECHANICAL ROOMS. PROVIDE TRAFFIC TYPING AS REQUIRED. Z. PROVIDE ALL SIGNAGE, IDENTIFYING DEVICES AND HARDWARE AS REQUIRED BY TORONTO MUNICIPAL CODE PROPERTY STANDARDS. SEE: 624-41, 624-42 AND 624-43. [EC] PARKING SPACE EQUIPPED WITH ELECTRICAL CONDUIT [PO] PARKING SPACE EQUIPPED WITH POWER OUTLET

Construction

KIRKOR ARCHITECTS + PLANNERS
20 Martin Road Avenue, Toronto, Ontario, M3J 2K8
Tel: 416-663-6000, Fax: 416-663-1234, www.kirkorarchitects.com

No.: Revision Date
1 Site Instruction #17 Nov. 09, 2017
2 Site Instruction #28 Sept. 06, 2018

As Indicated

Drawn by: A.B.
Checked by: C.A.
Project No.: 13148
Date: November 4, 2018
Drawing No.: A1-06

AQUAVISTA
AT BAYSIDE TORONTO

Ontario Building Code
Compliance Diagram
Levels P4-P1

Hines TRIDEL
AQUAVISTA
Block 3 - R3 & R4
263 Queens Quay East
Toronto, ON