

American
Standard

PL.22

Afwall Millennium Flowise®
Elongated



Wall hung Toilet - for flush valve

Vitreous china

Flushometer - Electronic - Exposed - No touch -
Hardwired

To be specified

Centoco



CAD \$55.16

- ☒ **820STS.001 Toilet Seat**, extra heavy duty, for elongated bowl, open front, white solid plastic, with cover, stainless steel check hinges, metal flat washers stainless steel posts and nuts.

Sloan



CAD \$685.44

- ☒ **111 XL ES-S-CP Regal XL Optima Exposed Flushometer for Top Spud Toilet**, chrome plated, 6 L (1.6 US Gal) factory set flow, quiet action diaphragm type, infrared sensor located on a 125 mm x 125 mm (4-15/16" x 4-15/16") stainless steel plate, courtesy flush over-ride button, back-check angle stop (screwdriver operated), vacuum breaker, sensor located above the toilet, 5 VA Power Required per unit.

- ☒ **Sensor to clear toilet seat cover.**

- ☒ **Provide 4" (102 mm) square electrical box for mounting sensor plate.**



- ☒ **EL-154 Box Mount Hard Wired Transformer**, 120 VAC/ 24 VAC, 50 VA.

- ☒ **Will operate up to 10 'Optima' flush valve units.**

Watts



CAD \$878.00

- ☒ **ISCA-101-M11 Single horizontal, Adjustable Toilet Carrier**, all epoxy coated cast iron fitting, adjustable ABS slide nipple with integral test cap and neoprene bowl gasket, wasted plated hardware, chrome cap nuts, tiling frame, ABS nipples with integral test caps and neoprene bowl gaskets, plated hardware and chrome cap nuts, 102 mm (4") no hub waste, 51 mm (2") no hub vent.
Minimum space required: 305 mm (12") finished metal stud wall to back of pipe space.

☒ **3351.101.020**



CAD \$325.00


White wall hung - vitreous china with EverClean antimicrobial surface which inhibits the growth of stain and odor causing bacteria mold and mildew - siphon jet flush action - condensate channel - elongated bowl - 54 mm (2-1/8") fully glazed internal trapway - 38 mm (1-1/2") dia. Top spud .
Minimum working pressure range: 25 psi to 80 P.S.I. (550 kPa) maximum.

Nominal Dimensions: 330 mm (13") wide x 660 mm (26") front to back x 330 mm (13") high.

Water Surface: 305 mm x 254 mm (12" x 10") water surface

Shipping Weight: 23 kg (52 lbs)

Water Consumption: HET operates in the range of 4.2 L to 6 L (1.1 US Gal to 1.6 US Gal) per flush

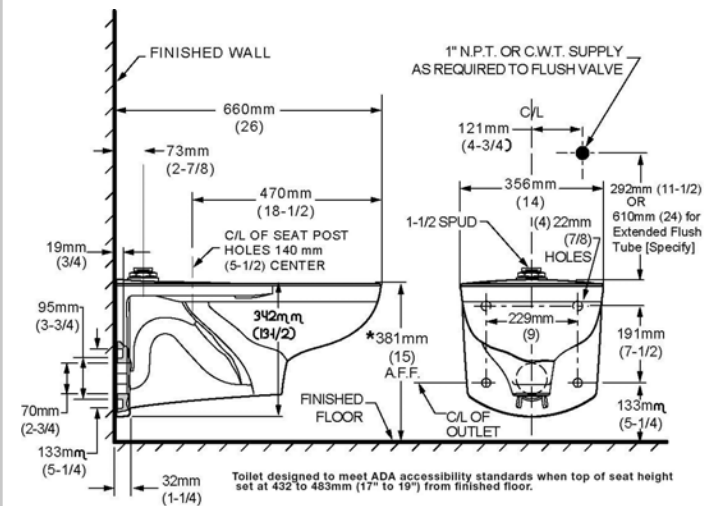

- ☒ **Mount fixture 16"(406mm) above finished floor to rim of toilet (or as required to meet local codes).**

Note :

Drawing No. : (333484) T348 SE559 FV13673
TRS4989 CA23446

Estimated Total:
CAD \$1,943.60