



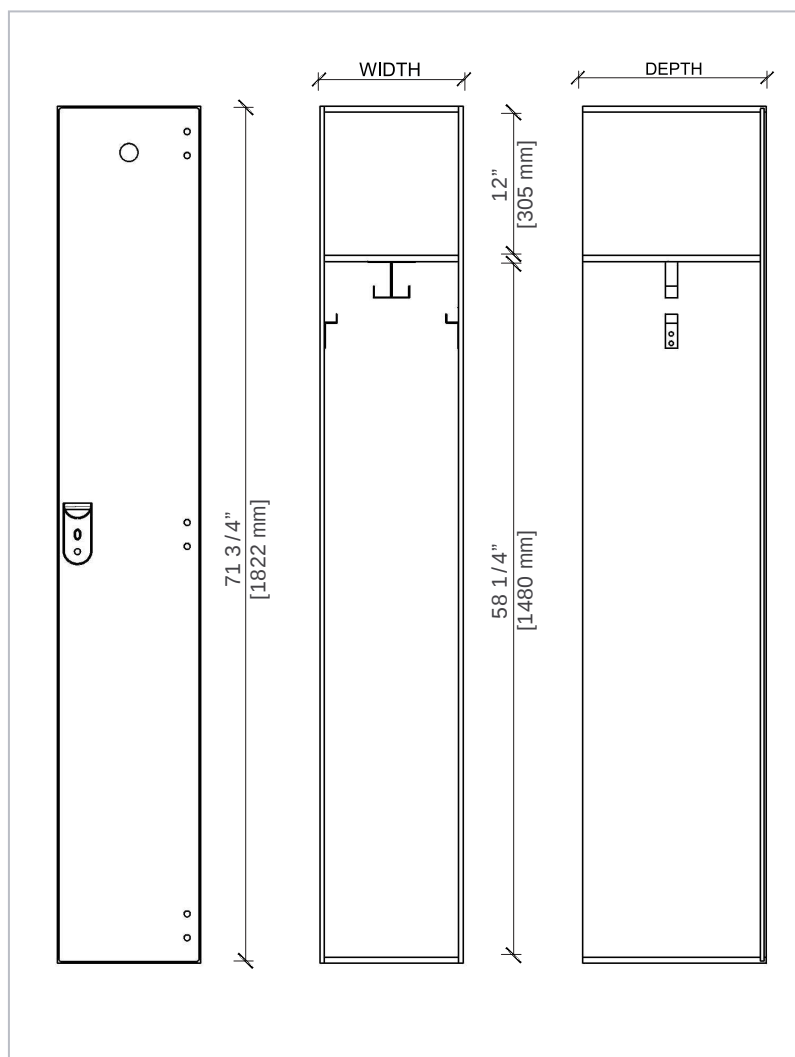

STANDARD SIZES

HEIGHT	WIDTH	DEPTH
59-3/4" (1509 mm)	12" (305 mm)	12-3/8" (314mm)
71-3/4" (1822 mm)	15" (381 mm)	15-3/8" (391 mm)
	18" (457 mm)	20-3/8" (518 mm)
		24-3/8" (619 mm)

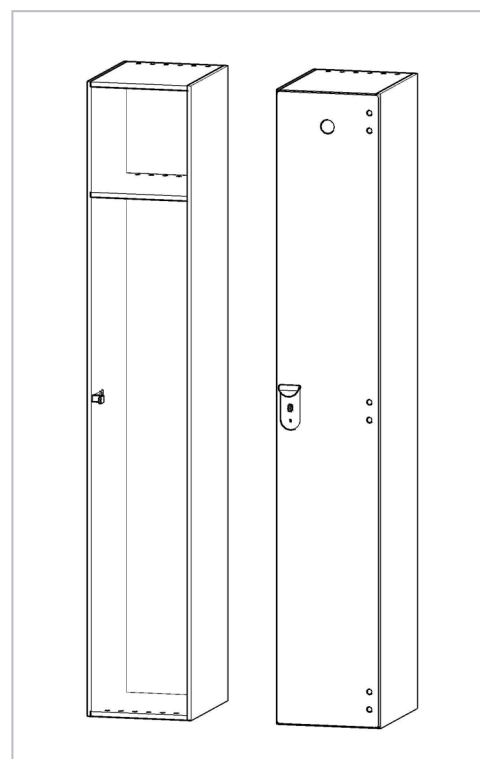

ACCELERATED DELIVERY/ STOCK COLOUR SELECTION

 WHITE Athlon E0-00 CR	 MID GREY Athlon E0-04 CR	 BLACK Athlon E0-09 CR	 SILVER MAPLE Athlon W 71-03 QZ	 VERONA WALNUT Athlon W 82-03 QZ
--	--	---	---	---


INDIVIDUAL UNIT/FRAME

Side panels 3/8" (10 mm) Thick, Tops & Bottoms 1/2" (13 mm) Thick, Shelves 1/2" (13 mm) Thick, Hasp 10 gauge Stainless Steel. Door hinge 5 Knuckle Stainless/ Door 1/2" (13 mm) Thick. Stainless Steel hasp plate and handle. Recessed Stainless Steel number disc.

Interior: Vent holes located in Top, Bottom and all Shelves. Two single prong side hooks per door opening. One two prong ceiling mounted hook per door opening.


*Hooks are included standard in 1, 2 & Z Tier locker types.

*Two prong ceiling mounted hooks cannot be used in shallow lockers depths when using optional door limit arm.

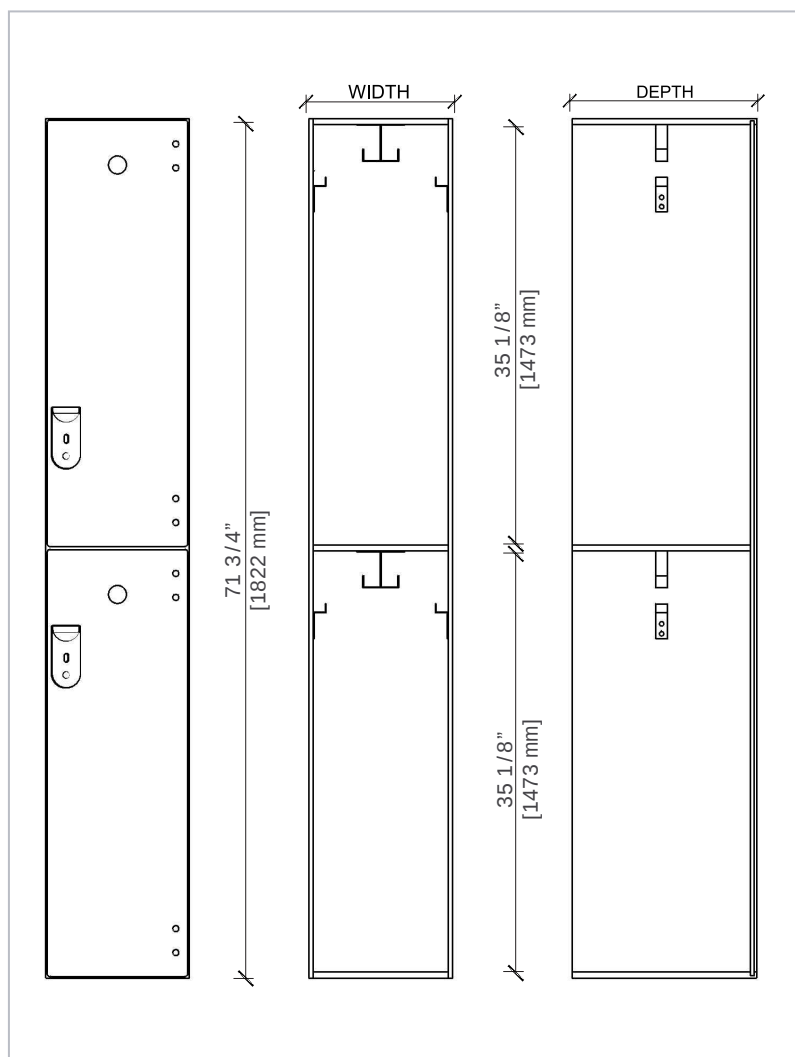

STANDARD SIZES

HEIGHT	WIDTH	DEPTH
59-3/4" (1509 mm)	12" (305 mm)	12-3/8" (314mm)
71-3/4" (1822 mm)	15" (381 mm)	15-3/8" (391 mm)
	18" (457 mm)	20-3/8" (518 mm)
		24-3/8" (619 mm)

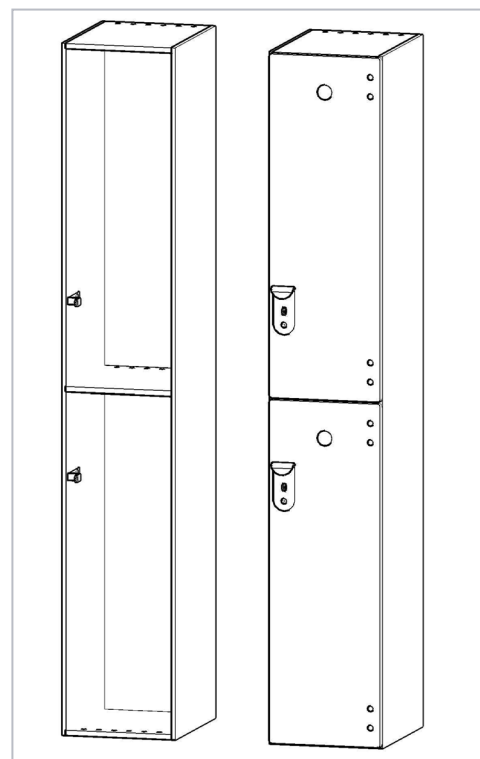

ACCELERATED DELIVERY/ STOCK COLOUR SELECTION

 WHITE Athlon E0-00 CR	 MID GREY Athlon E0-04 CR	 BLACK Athlon E0-09 CR	 SILVER MAPLE Athlon W 71-03 QZ	 VERONA WALNUT Athlon W 82-03 QZ
--	--	---	---	---


INDIVIDUAL UNIT/FRAME

Side panels 3/8" (10 mm) Thick, Tops & Bottoms 1/2" (13 mm) Thick, Shelves 1/2" (13 mm) Thick, Hasp 10 gauge Stainless Steel. Door hinge 5 Knuckle Stainless/ Door 1/2" (13 mm) Thick. Stainless Steel hasp plate and handle. Recessed Stainless Steel number disc.

Interior: Vent holes located in Top, Bottom and all Shelves. Two single prong side hooks per door opening. One two prong ceiling mounted hook per door opening.


*Hooks are included standard in 1, 2 & Z Tier locker types.

*Two prong ceiling mounted hooks cannot be used in shallow lockers depths when using optional door limit arm.

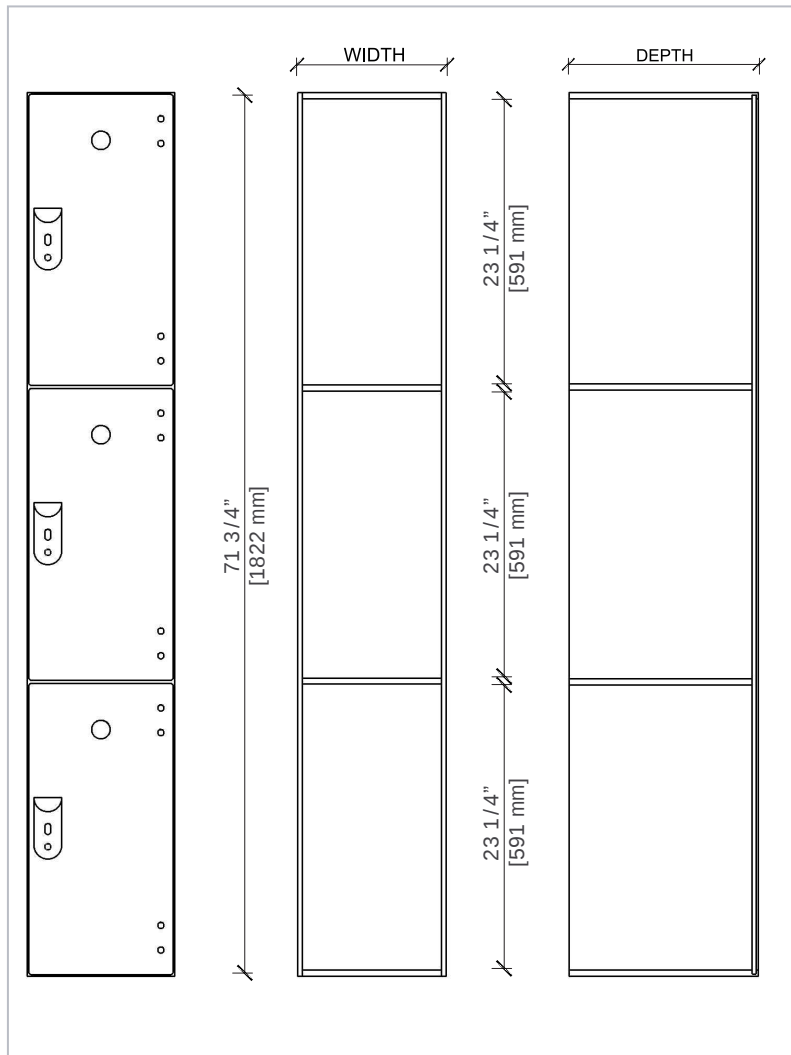

STANDARD SIZES

HEIGHT	WIDTH	DEPTH
59-3/4" (1509 mm)	12" (305 mm)	12-3/8" (314mm)
71-3/4" (1822 mm)	15" (381 mm)	15-3/8" (391 mm)
	18" (457 mm)	20-3/8" (518 mm)
		24-3/8" (619 mm)

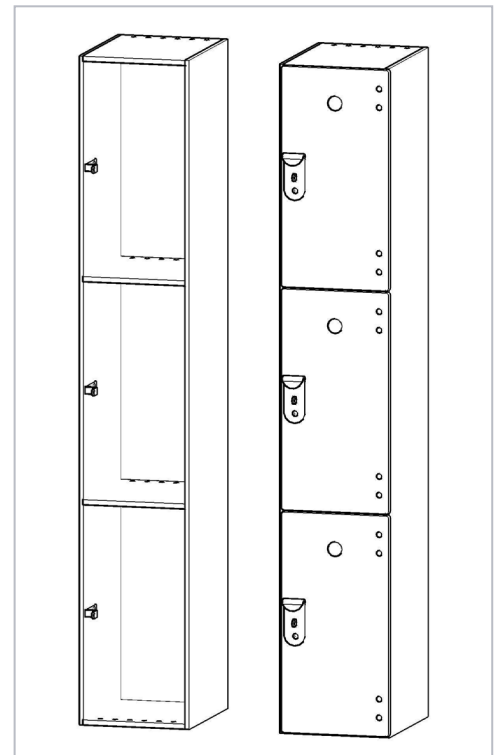

ACCELERATED DELIVERY/ STOCK COLOUR SELECTION

 WHITE Athlon E0-00 CR	 MID GREY Athlon E0-04 CR	 BLACK Athlon E0-09 CR	 SILVER MAPLE Athlon W 71-03 QZ	 VERONA WALNUT Athlon W 82-03 QZ
--	--	---	---	---


INDIVIDUAL UNIT/FRAME

Side panels 3/8" (10 mm) Thick, Tops & Bottoms 1/2" (13 mm) Thick, Shelves 1/2" (13 mm) Thick, Hasp 10 gauge Stainless Steel. Door hinge 5 Knuckle Stainless/ Door 1/2" (13 mm) Thick. Stainless Steel hasp plate and handle. Recessed Stainless Steel number disc.

Interior: Vent holes located in Top, Bottom and all Shelves. Two single prong side hooks per door opening. One two prong ceiling mounted hook per door opening.


*Hooks are included standard in 1,2 & Z Tier locker types.

*Two prong ceiling mounted hooks cannot be used in shallow lockers depths when using optional door limit arm.

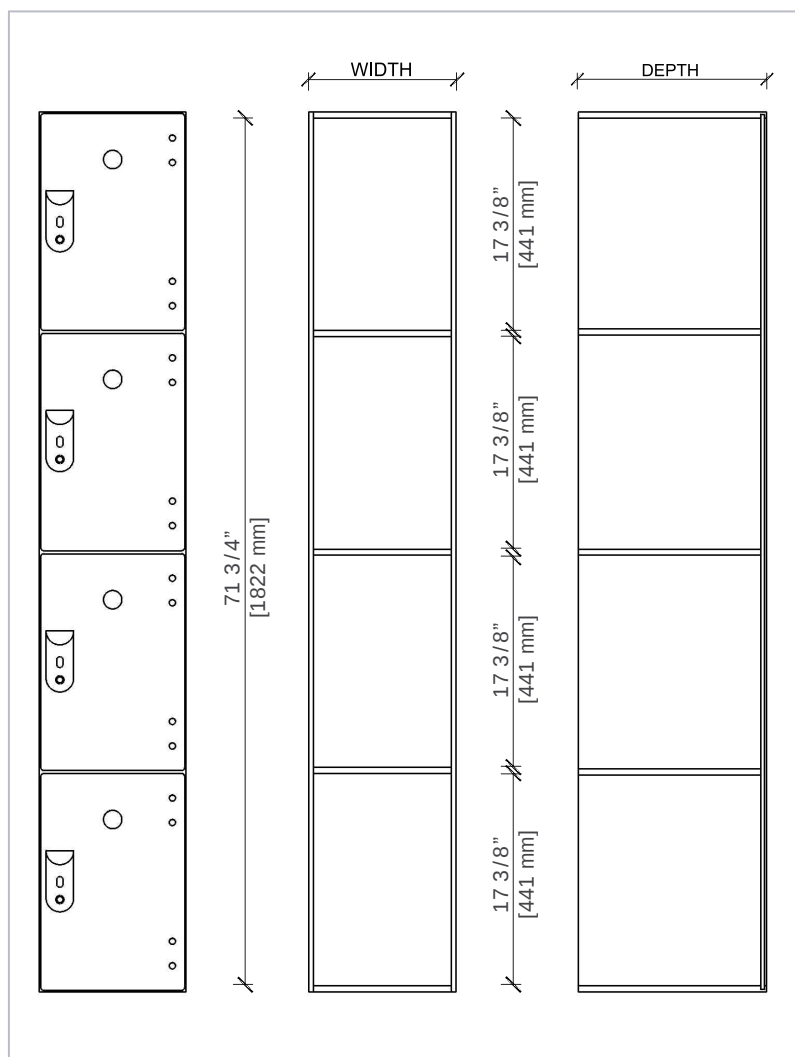

STANDARD SIZES

HEIGHT	WIDTH	DEPTH
59-3/4" (1509 mm)	12" (305 mm)	12-3/8" (314mm)
71-3/4" (1822 mm)	15" (381 mm)	15-3/8" (391 mm)
	18" (457 mm)	20-3/8" (518 mm)
		24-3/8" (619 mm)

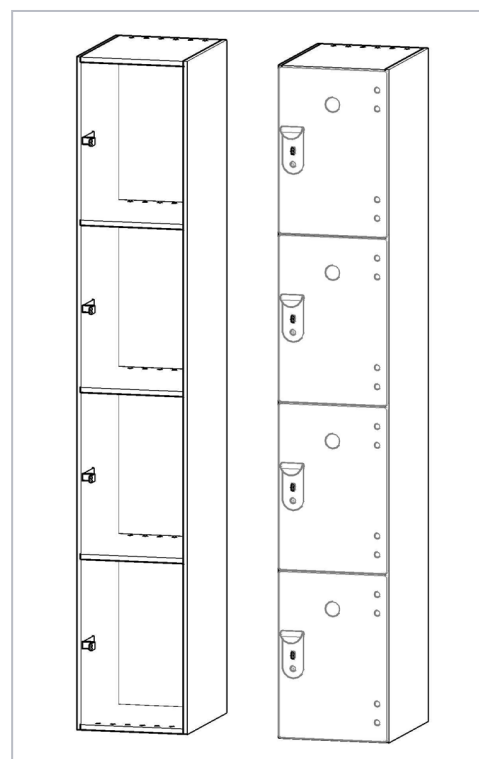

ACCELERATED DELIVERY/ STOCK COLOUR SELECTION

 WHITE Athlon E0-00 CR	 MID GREY Athlon E0-04 CR	 BLACK Athlon E0-09 CR	 SILVER MAPLE Athlon W 71-03 QZ	 VERONA WALNUT Athlon W 82-03 QZ
--	--	---	---	---


INDIVIDUAL UNIT/FRAME

Side panels 3/8" (10 mm) Thick, Tops & Bottoms 1/2" (13 mm) Thick, Shelves 1/2" (13 mm) Thick, Hasp 10 gauge Stainless Steel. Door hinge 5 Knuckle Stainless/ Door 1/2" (13 mm) Thick. Stainless Steel hasp plate and handle. Recessed Stainless Steel number disc.

Interior: Vent holes located in Top, Bottom and all Shelves. Two single prong side hooks per door opening. One two prong ceiling mounted hook per door opening.


*Hooks are included standard in 1,2 & Z Tier locker types.

*Two prong ceiling mounted hooks cannot be used in shallow lockers depths when using optional door limit arm.

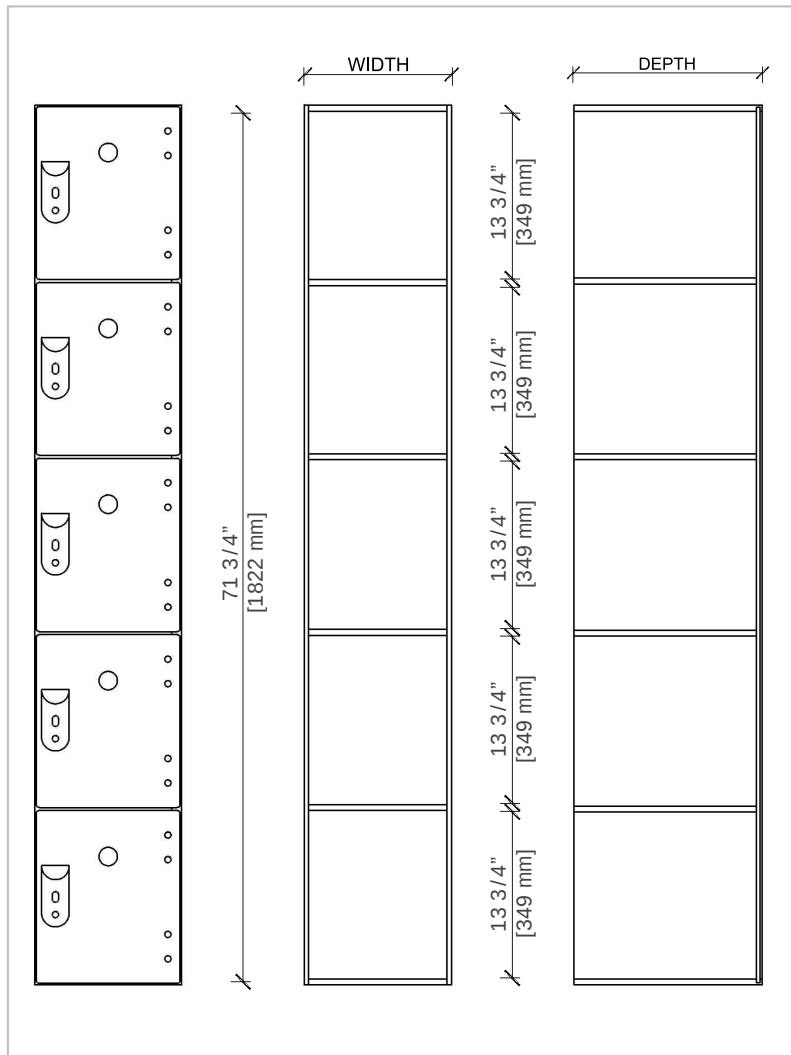

STANDARD SIZES

HEIGHT	WIDTH	DEPTH
59-3/4" (1509 mm)	12" (305 mm)	12-3/8" (314mm)
71-3/4" (1822 mm)	15" (381 mm)	15-3/8" (391 mm)
	18" (457 mm)	20-3/8" (518 mm)
		24-3/8" (619 mm)

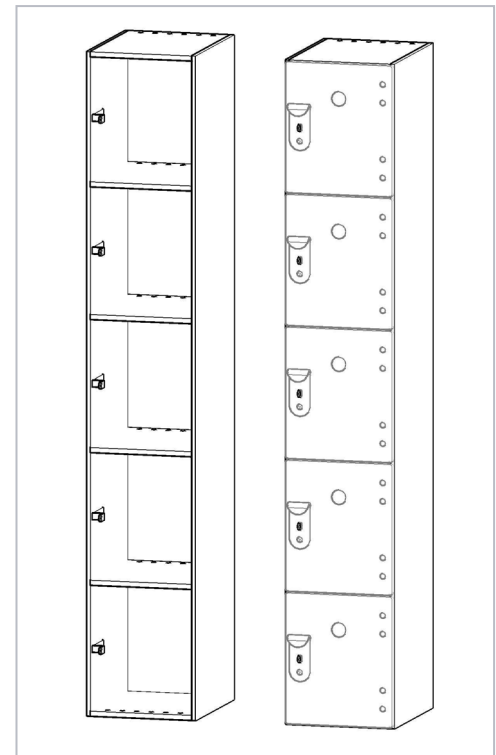

ACCELERATED DELIVERY/ STOCK COLOUR SELECTION

	WHITE Athlon E0-00 CR		MID GREY Athlon E0-04 CR		BLACK Athlon E0-09 CR		SILVER MAPLE Athlon W 71-03 QZ		VERONA WALNUT Athlon W 82-03 QZ
--	---------------------------------	---	------------------------------------	---	---------------------------------	--	--	---	---


INDIVIDUAL UNIT/FRAME

Side panels 3/8" (10 mm) Thick, Tops & Bottoms 1/2" (13 mm) Thick, Shelves 1/2" (13 mm) Thick, Hasp 10 gauge Stainless Steel. Door hinge 5 Knuckle Stainless/ Door 1/2" (13 mm) Thick. Stainless Steel hasp plate and handle. Recessed Stainless Steel number disc.

Interior: Vent holes located in Top, Bottom and all Shelves. Two single prong side hooks per door opening. One two prong ceiling mounted hook per door opening.


*Hooks are included standard in 1,2 & Z Tier locker types.

*Two prong ceiling mounted hooks cannot be used in shallow lockers depths when using optional door limit arm.

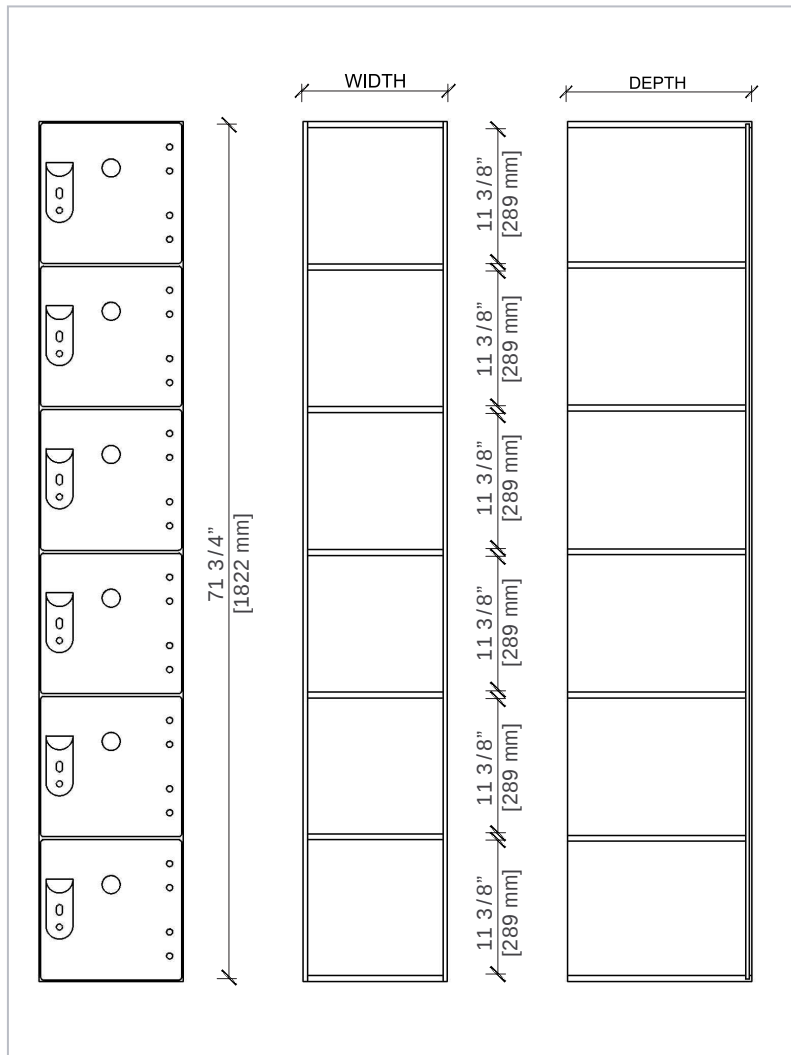

STANDARD SIZES

HEIGHT	WIDTH	DEPTH
59-3/4" (1509 mm)	12" (305 mm)	12-3/8" (314mm)
71-3/4" (1822 mm)	15" (381 mm)	15-3/8" (391 mm)
	18" (457 mm)	20-3/8" (518 mm)
		24-3/8" (619 mm)

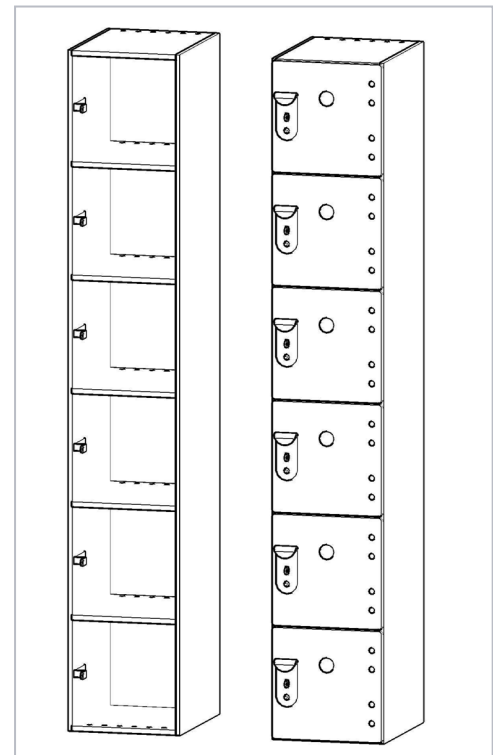

ACCELERATED DELIVERY/ STOCK COLOUR SELECTION

 WHITE Athlon E0-00 CR	 MID GREY Athlon E0-04 CR	 BLACK Athlon E0-09 CR	 SILVER MAPLE Athlon W 71-03 QZ	 VERONA WALNUT Athlon W 82-03 QZ
--	--	---	---	---


INDIVIDUAL UNIT/FRAME

Side panels 3/8" (10 mm) Thick, Tops & Bottoms 1/2" (13 mm) Thick, Shelves 1/2" (13 mm) Thick, Hasp 10 gauge Stainless Steel. Door hinge 5 Knuckle Stainless/ Door 1/2" (13 mm) Thick. Stainless Steel hasp plate and handle. Recessed Stainless Steel number disc.

Interior: Vent holes located in Top, Bottom and all Shelves. Two single prong side hooks per door opening. One two prong ceiling mounted hook per door opening.


*Hooks are included standard in 1,2 & Z Tier locker types.

*Two prong ceiling mounted hooks cannot be used in shallow lockers depths when using optional door limit arm.

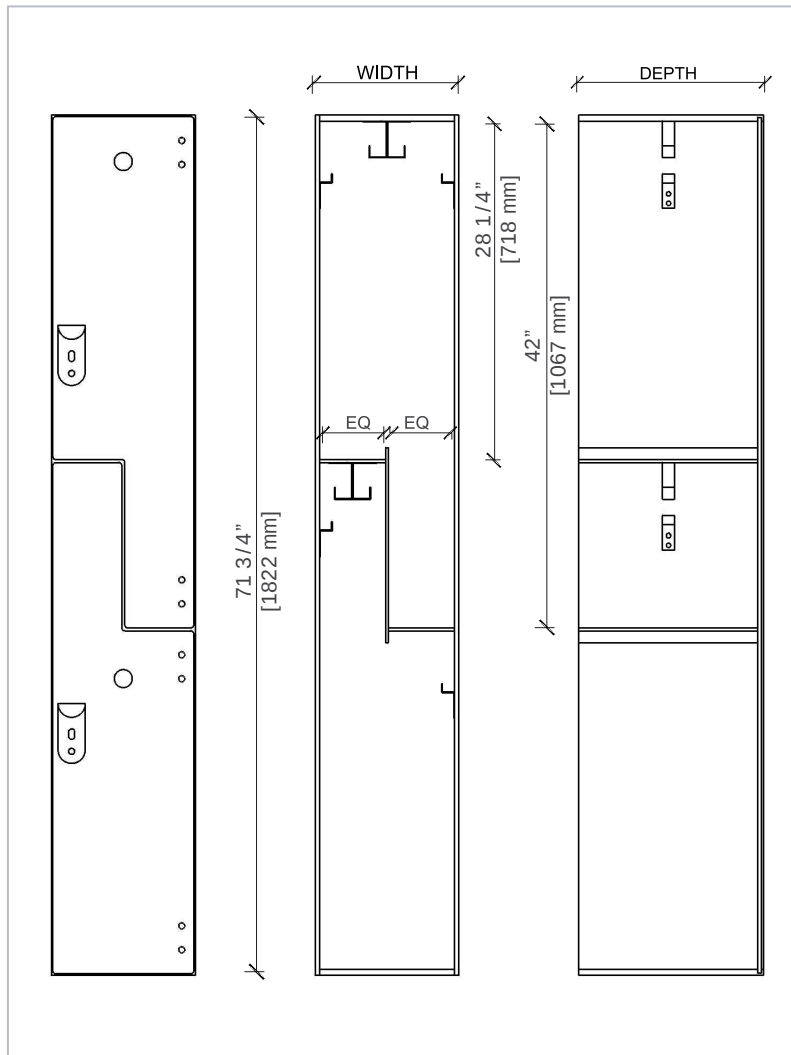

STANDARD SIZES

HEIGHT	WIDTH	DEPTH
59-3/4" (1509 mm)	12" (305 mm)	12-3/8" (314mm)
71-3/4" (1822 mm)	15" (381 mm)	15-3/8" (391 mm)
	18" (457 mm)	20-3/8" (518 mm)
		24-3/8" (619 mm)

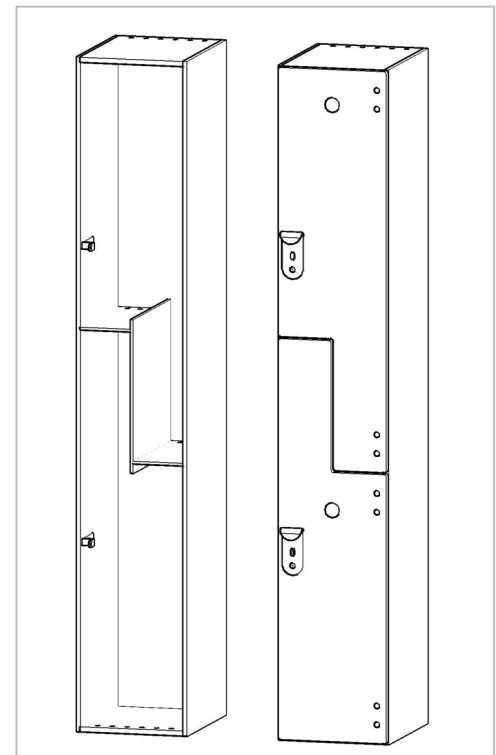

ACCELERATED DELIVERY/ STOCK COLOUR SELECTION

 WHITE Athlon E0-00 CR	 MID GREY Athlon E0-04 CR	 BLACK Athlon E0-09 CR	 SILVER MAPLE Athlon W 71-03 QZ	 VERONA WALNUT Athlon W 82-03 QZ
--	--	---	---	---

INDIVIDUAL UNIT/FRAME


Side panels 3/8" (10 mm) Thick, Tops & Bottoms 1/2" (13 mm) Thick, Shelves 1/2" (13 mm) Thick, Hasp 10 gauge Stainless Steel. Door hinge 5 Knuckle Stainless/ Door 1/2" (13 mm) Thick. Stainless Steel hasp plate and handle. Recessed Stainless Steel number disc.

Interior: Vent holes located in Top, Bottom and all Shelves. Two single prong side hooks per door opening. One two prong ceiling mounted hook per door opening.



*Hooks are included standard in 1, 2 & Z Tier locker types.

*Two prong ceiling mounted hooks cannot be used in shallow lockers depths when using optional door limit arm.


FIN. GABLE, ENDS

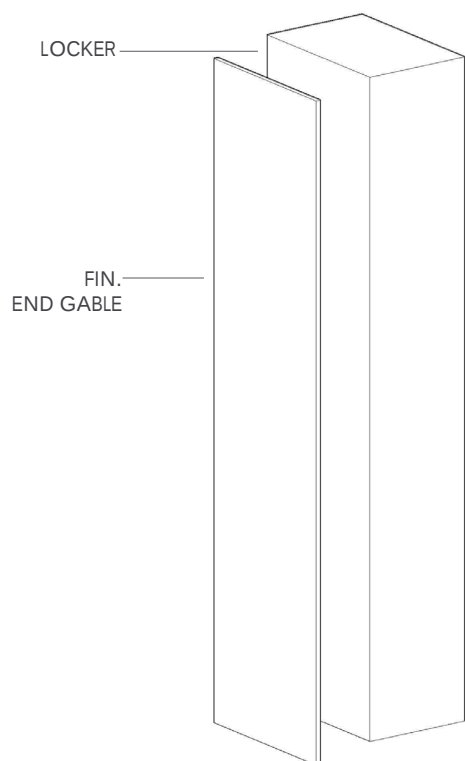




SLOPED TOP

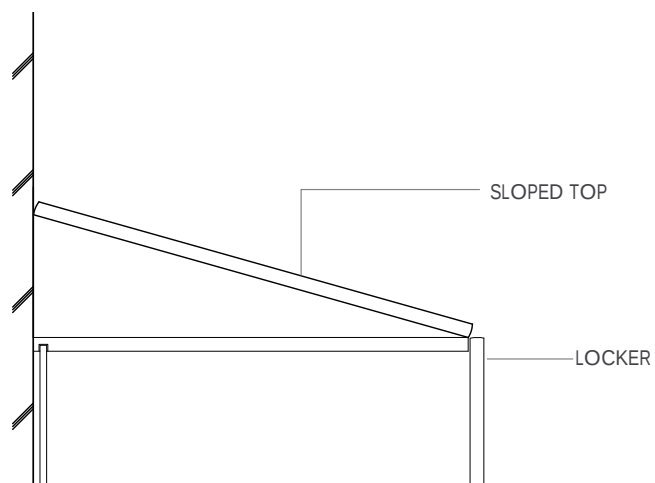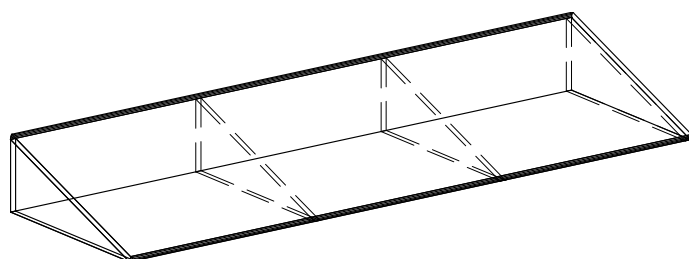




ADJUSTABLE BASE

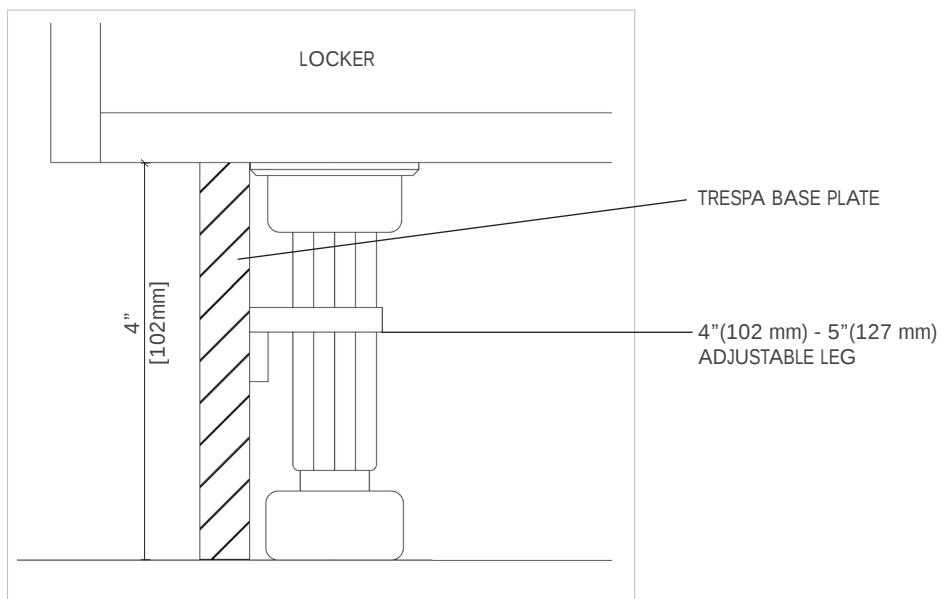

CORNER FILLER

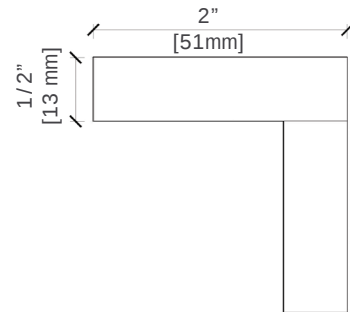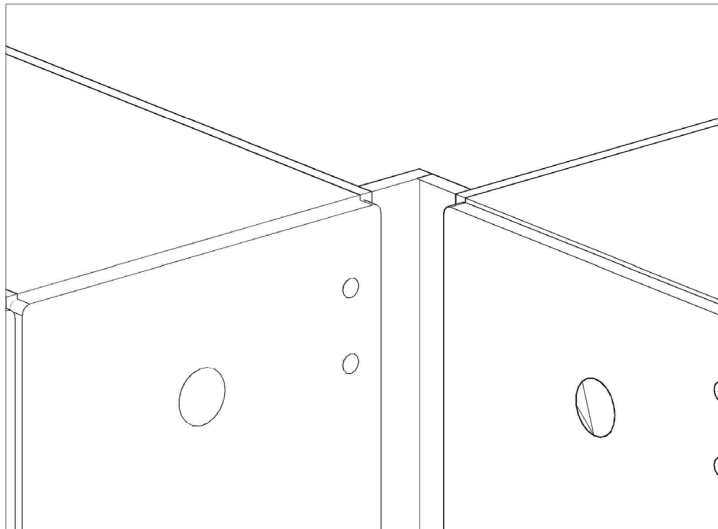

WALL FILLER

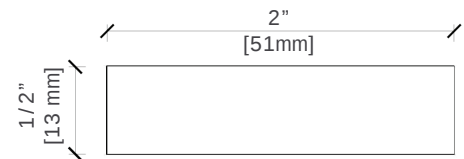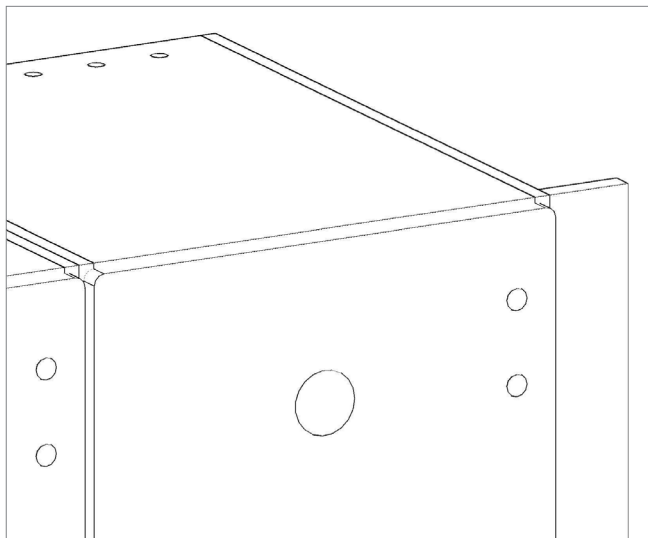

SLOPED TOPS AND BASE, FINISHED GABLES, AND FILLERS

TOP: Flat tops 1/2" (13 mm) Thick with visible ends and edges machine routed to a smooth profile. Sloped tops 1/2" (13 mm) Thick. High at peak. Sloped tops to have support gussets. Depths of all tops to be the depth of the body of the locker.

FINISHED END PANEL: Finished End Panels to be 1/2" (13 mm) Thick with visible ends and edges to have a machine routed smooth profile.

BASE: Adjustable 4"(102 mm) - 5"(127 mm) ABS legs, 4 per unit. Base to have solid phenolic base plate mountable to front ABS legs.

FILLER: Fillers to be included as per drawings. Fillers to be supplied square and to be scribed on site during installation.