


Creek





Integrated architecture solutions

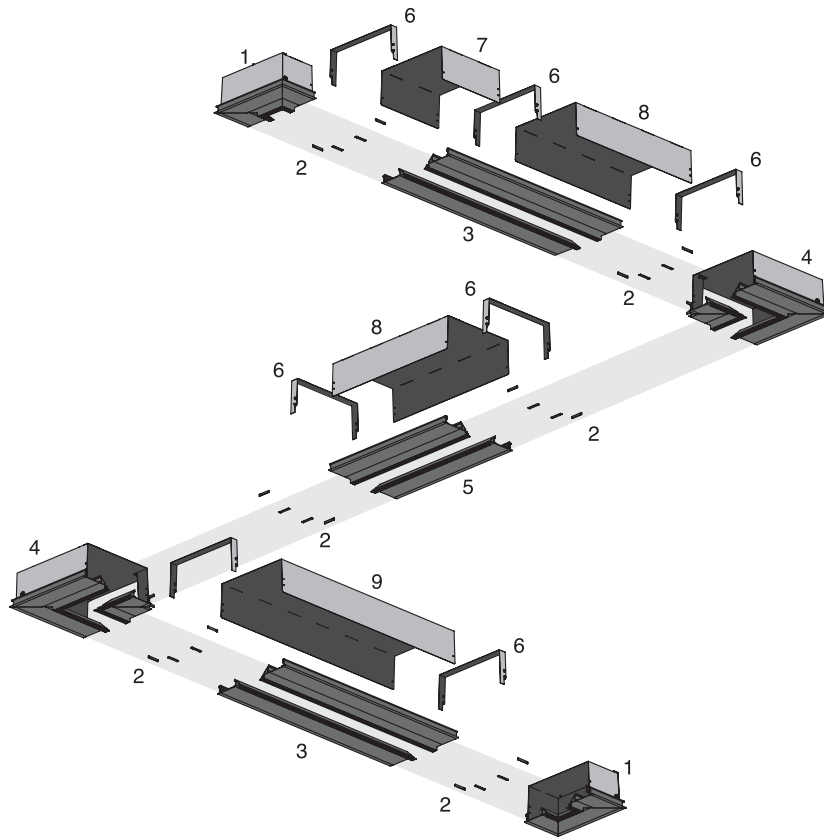

Creek is a **structure with no external frame** that guarantees the installation of professional lighting technology solutions with **utmost flexibility**. The **ingenious installation system** makes it easy to insert the structure in any false ceiling in just a few simple steps and without using any tools. Creek is the ideal partner of all retailers who want to create an atmosphere in line with their own visual merchandising concept using an instrument that offers countless applications and discreetly blends in with the surrounding environment.

- 1 | End carter
- 2 | Fixing linear brackets
- 3 | Linear profiles (900 mm)
- 4 | L-shaped carter
- 5 | Linear profiles (300 mm)
- 6 | Carter joint
- 7 | Linear carter (300 mm)
- 8 | Linear carter (600 mm)
- 9 | Linear carter (900 mm)

Functional modularity




The spotlights are powered by one single line, regardless of their number.

Light management




Three light performances are available, depending on customer's needs.

Modular structure




The type of structure depends on the dimensions of the false ceiling.

Step 1




Once the structure has been prepared in the false ceiling, the swing arm can be inserted: the lighting fixture is located at one end and the fixing base at the other.

Step 2




Fixing is carried out through snap-fit mounting, by inserting the base end in the profile inner seat.

Step 3




Then the base is pressed downwards, close to the point where the swing arm is inserted.

Step 4



The lighting fixture is thus ready to be extracted and pointed. It may also be moved along the structure by pressing two flaps and sliding the fixing base.

Creek Pound_1 | System_85 - System_130 | 198-264 V | arrayLED 15 W 350 mA




type			colour			optic		
Black	CRI 95	64487	3000 K	1269 lm	W	15°	15	
			4000 K	1365 lm	N	30°	30	
						60°	60	
Black	CRI 80	64607	3000 K	1682 lm	W	15°	15	
			4000 K	1806 lm	N	30°	30	
						60°	60	

Creek Pound_1




Carter System_85 End_C




type	L mm	
Black	300	64407
Black	600	64417
Black	900	64427

Carter System_85 End_C




type		
Black		64437

Carter System_85 L-Shaped_C



type		
Black		64447

Cable junction System_85 Joint_C



type		
Black		64467